

COUNTY OF



ALLEGHENY

SARA INNAMORATO
COUNTY EXECUTIVE

**Allegheny County Health Department
Air Quality Program
Monitoring Section
Pittsburgh, Pennsylvania**

Air Monitoring Network Plan for Calendar Year 2026

August 27, 2025



ALLEGHENY COUNTY HEALTH DEPARTMENT
542 FOURTH AVENUE • PITTSBURGH, PA 15219
PHONE (412) 687-ACHD (2243) • FAX (412) 578-8325
WWW.ALLEGHENYCOUNTRY.US/HEALTHDEPARTMENT



Contents

CERTIFICATION	5
EXECUTIVE SUMMARY	6
PLAN APPROVAL	7
1.0 Annual Air Monitoring Network Plan Requirements	8
2.0 Changes Since the Last Air Monitoring Network Plan	10
2.1 Monitoring Additions.....	10
2.2 Monitoring Reductions	10
2.3 Monitoring Relocations/Modifications	10
2.3.1 Postponement of Site Move of Lawrenceville Monitoring Station	10
2.3.2 Addition of Continuous PM _{2.5} Monitoring at Harrison Site	10
3.0 Proposed Changes to the Air Monitoring Network	10
3.1 Proposed Monitoring Additions.....	11
3.1.1 Continuous PM _{2.5} Monitors at South Fayette and Glassport Sites	11
3.1.2 Hydrogen Sulfide Monitoring at Clairton Site.....	11
3.1.3 Addition of Meteorology (wind speed & direction) Sensors at Avalon and Clairton site	11
3.2 Proposed Monitoring Reductions	11
3.3 Proposed Monitoring Relocations/Modifications	11
3.4 Proposed Air Monitoring Site Relocations	11
3.4.1 Lawrenceville Monitoring Station (NCore).....	11
4.0 Air Monitoring Network Summary	16
5.0 Appendix A Requirements.....	17
6.0 Appendix B Requirements	18
7.0 Appendix C Requirements	20
8.0 Appendix D Requirements.....	21
8.1 Ozone Design Criteria.....	22
8.2 Carbon Monoxide Design Criteria.....	23
8.3 Nitrogen Dioxide Design Criteria	23
8.4 Sulfur Dioxide Design Criteria	24
8.5 Lead (Pb) Design Criteria	25
8.6 PM ₁₀ Design Criteria.....	27
8.7 Fine Particulate Matter (PM _{2.5}) Design Criteria	27

8.8 Coarse Particulate Matter Design Criteria	30
8.9 Meteorological Monitoring	30
9.0 Appendix E Requirements	31
10.0 Detailed Air Monitoring Site Descriptions	32
10.1 Lawrenceville.....	36
Lawrenceville Meteorological Sensors.....	41
10.2 Liberty.....	43
Liberty Meteorological Sensors	46
10.3 Glassport	49
10.4 North Braddock.....	52
North Braddock Meteorological Sensors.....	53
10.5 Harrison.....	56
10.6 South Fayette	59
10.7 Clairton	61
10.8 Avalon.....	64
10.9 Parkway East.....	66
Parkway East Meteorological Sensors.....	67
11.0 GLOSSARY OF TERMS AND ABBREVIATIONS	70
12.0 Public Comment Period	72
Appendix A: Special Study Projects.....	72
A1: Introduction.....	72
A2: Air Toxics Sampling	73
A2.1 Lawrenceville National Air Toxics Trends Station (NATTS).....	73
A2.2 Charcoal Tube Sampling.....	73
A2.3 Hydrogen Sulfide	73
A3: Settled Particulate	74
Figure 3.1 Potential Future PM _{2.5} Area Served Polygons, Allegheny County	12
Figure 3.2 Potential Future Ozone Area Served Polygons, Allegheny County	13
Figure 3.3 Potential Future PM ₁₀ Area Served Polygons, Allegheny County	13
Figure 3.4 Potential Future SO ₂ Area Served Polygons, Allegheny County	14
Figure 3.5 Potential Future NO ₂ Area Served Polygons, Allegheny County	14
Figure 3.6 Potential Future CO Area Served Polygons, Allegheny County	15

Figure 4 Air Monitoring Network Map	16
Table 4 Air Monitoring Network Summary	17
Figure 8.1 Ozone Monitoring Map	22
Figure 8.2 CO Monitoring Map	23
Figure 8.3 Nitrogen Dioxide Monitoring Map	24
Figure 8.4 Sulfur Dioxide Monitoring Map.....	25
Figure 8.6 PM ₁₀ Monitoring Map	27
Table 8 PM _{2.5} Monitor Scales and Objectives	29
Figure 8.7 PM _{2.5} Monitoring Map	29
Figure 8.9 Allegheny County Meteorological Map (Surface Wind Roses 2020-2024)	31
Table 10 Monitoring Parameters and Methods.....	35
Figure 10.1.1 Lawrenceville Location Map.....	42
Figure 10.1.2 Lawrenceville Wind Rose (2020-2024)	43
Figure 10.2.1 Liberty Location Map.....	47
Figure 10.2.2 Liberty Wind Rose (2020-2024)	47
Figure 10.3.1 Glassport Location Map	50
Figure 10.3.2 Liberty, Glassport and Clairton Stations Map.....	51
Figure 10.4.1 North Braddock Location Map.....	54
Figure 10.4.2 North Braddock Wind Rose (2020-2024)	55
Figure 10.5 Harrison Location Map.....	58
Figure 10.6 South Fayette Location Map	60
Figure 10.7 Clairton Location Map	63
Figure 10.8 Avalon Location Map.....	65
Figure 10.9.1 Parkway East Location Map.....	68
Figure 10.9.2 Parkway East Wind Rose (2020-2024)	69

CERTIFICATION

To the best of my knowledge, this plan has been checked for completeness and the details presented herein are accurate, error-free, legible, and representative of the methods employed by the Allegheny County Health Department Air Quality Program Monitoring Section to measure air quality.

David D. Good
Program Manager, Air Monitoring

EXECUTIVE SUMMARY

Allegheny County Health Department's Air Quality Program: Monitoring (ACHD) operates an air monitoring network. Federal Regulations ([40CFR58.10](#)) require ACHD to prepare an annual monitoring network plan. ACHD must document the process for obtaining public comment and include any comments received through the public notification process within their submitted plan. Public comments received on the air monitoring plan must be included in the version submitted to the United States Environmental Protection Agency (EPA). All proposed additions, modifications, and discontinuations of State or Local Air Monitoring Station (SLAMS) monitors in ACHD's air monitoring network plan are subject to EPA approval.

The summary of air monitoring network changes since the previous approval includes:

- Postponement of Lawrenceville Monitoring station site move due to unforeseen new construction and commercial operations in Chateau
- Addition of continuous PM_{2.5} monitoring at Harrison site

The summary of *proposed* air monitoring network changes includes:

- New PM_{2.5} monitoring site at Glassport site
- Addition of continuous PM_{2.5} monitoring at South Fayette site
- Addition of meteorology (wind speed & direction) sensors at Avalon and Clairton sites
- Addition of hydrogen sulfide monitoring at Clairton site
- Removal of PM₁₀ monitoring at Glassport site
- Relocation of Lawrenceville monitoring station (NCore, PAMS, NATTS, IMPROVE, ASCENT, and CSN) to the Carnegie Mellon University campus

PLAN APPROVAL

The air monitoring network plan for calendar year 2026 is hereby recommended for approval and commits the Allegheny County Health Department, Air Quality Program to present the plan to the EPA for approval.

Allegheny County Health Department, Air Quality Program

Signature:

David D. Good

Program Manager – Air Monitoring

1.0 Annual Air Monitoring Network Plan Requirements

The Allegheny County Health Department's Air Quality Program: Monitoring has prepared the public comment version of the 2026 air monitoring network plan. In addition to the federal requirements, effort has been made to document all air monitoring performed in Allegheny County. The body of the plan focuses on the regulatory requirements for our SLAMS (state or local air monitoring stations network) sites, whereas Appendix A presents information regarding monitoring activities not required by the plan. Appendix A is included in response to public comments received regarding previous network plans and provides details about the non-SLAMS special study monitoring performed in Allegheny County. All monitoring data generated by ACHD is available through a right to know request ([Open Records page](#)).

40 CFR Part 58, §58.10 contains the air monitoring network plan requirements. Each year on July 1, the plan is to be submitted to the USEPA Regional (Region III) Administrator. A summary of the applicable requirements that parallels and condenses the regulatory text follows.

§58.10 (a) requires each agency to prepare an annual plan for an air quality surveillance system that consists of a network of SLAMS monitoring stations that can include Federal Reference Method (FRM), Federal Equivalent Method (FEM), and Approved Regional Method (ARM) monitors that are part of SLAMS, National Core Monitoring Network (NCORE), Chemical Speciation Network (CSN), Photochemical Assessment Monitoring Stations (PAMS), and Special Purpose Monitoring (SPM) stations. Prior to submittal, the plan must be made available for public inspection and comment for at least 30 days. In addition, the plan shall include:

1. A statement of whether the operation of each monitor meets the requirements of Appendices A, B, C, D, and E of 40CFR58, where applicable.
2. Any proposed SLAMS network modifications, including new or discontinued monitoring sites, new determinations that data are not of sufficient quality to be compared to the NAAQS, and changes in identification of monitors as suitable or not suitable for comparison against the annual PM_{2.5} NAAQS. The EPA Regional Administrator has 120 days to approve or disapprove the plan.
3. A plan for making PAMS measurements as required in 40CFR58, Appendix D, Paragraph 5(a). The PAMS Network Description of Appendix D may be used to meet this requirement. The plan shall provide for the required PAMS measurements to begin by June 1, 2021 (promulgated delay of 2 years from original target date of 2019).
4. An Enhanced Monitoring Plan (EMP) for ozone (O₃) in accordance with the requirements of 40CFR58, Appendix D, Paragraph 5(h). The EMP shall be submitted to the EPA Regional Administrator no later than October 1, 2019. This condition was satisfied in the 2020 plan (EPA letter dated October 28, 2019).

§58.10 (b) requires that the plan must contain the following information for each existing and proposed site:

1. The Air Quality System (AQS) site identification number.
2. The location, including street address and geographical coordinates.
3. The sampling and analysis method(s) for each measured parameter.
4. The operating schedules for each monitor.
5. Any proposals to remove or move a monitoring station within a period of 18 months following plan submittal.
6. The monitoring objective and spatial scale of representativeness for each monitor.
7. The identification of any sites that are suitable and sites that are not suitable for comparison against the annual PM_{2.5} NAAQS (as described in §58.30).
8. The Metropolitan Statistical Area (MSA), Core Based Statistical Area (CBSA), Combined Statistical Area (CSA), or other area represented by the monitor.
9. The designation of any lead (Pb) monitors as either source-oriented or non-source-oriented (no longer applicable in Allegheny County).
10. The identification of required NO₂ monitors as near-road, area-wide, or vulnerable and susceptible population monitors.
11. The identification of any PM_{2.5} FEMs and/or ARMs used in the monitoring agency's network where the data are not of sufficient quality to be compared to the NAAQS.

§58.10 (c) requires that the plan must document the process for obtaining public comment and include any comments received through the public notification process within their submitted plan.

§58.10 (d) The local agency shall perform and submit to the EPA Regional Administrator an assessment of the air quality surveillance system every 5 years to determine, at a minimum, if the network meets the monitoring objectives defined in Appendix D, whether new sites are needed, whether existing sites are no longer needed and can be terminated, and whether new technologies are appropriate for incorporation into the ambient air monitoring network. The network assessment must consider the ability of existing and proposed sites to support air quality characterization for areas with relatively high populations of susceptible individuals and, for any sites that are being proposed for discontinuance, the effect on data users other than the agency itself, such as nearby states and tribes or health effects studies. The agency must submit a copy of this 5-year assessment along with a revised annual network plan. The assessment was submitted to the EPA in July of 2025 and can be found here:

https://www.alleghenycounty.us/files/assets/county/v/1/government/health/documents/air-quality/reports/achd_2025_network_assessment.pdf.

§58.10 (e) All proposed additions and discontinuations of SLAMS monitors in annual monitoring network plans and periodic network assessments are subject to approval according to §58.14.

2.0 Changes Since the Last Air Monitoring Network Plan

2.1 Monitoring Additions

None.

2.2 Monitoring Reductions

None.

2.3 Monitoring Relocations/Modifications

2.3.1 Postponement of Site Move of Lawrenceville Monitoring Station

The planned move of the Lawrenceville site that houses the NCore, PAMS, NATTS, IMPROVE, ASCENT, and CSN monitoring programs was postponed due to an announced construction project across from the proposed site in Chateau. In late 2023 it was announced that a gas fueling station was zoned to be constructed at 1315 Western Avenue, Pittsburgh, PA 15233 - directly across the street from the proposed new monitoring site: [https://apps.pittsburghpa.gov/redtail/images/23525_ZBA_079_of_2023_DCP-ZDR-2022-14292_1315_WESTERN_AVE_\(1\).pdf](https://apps.pittsburghpa.gov/redtail/images/23525_ZBA_079_of_2023_DCP-ZDR-2022-14292_1315_WESTERN_AVE_(1).pdf).

The Department actively assessed other properties that could house the current Lawrenceville monitoring station while meeting federal siting criteria for NCore sites. On April 17th, 2025 a request for information (RFI) went out to the public seeking interest in potential air monitoring locations within the zip codes of 15201, 15206, 15213, 15217, 15224, 15232, 15260, and 15261 (all areas in the northeast to east quadrant in relation to downtown Pittsburgh). No formal responses to this request were provided to the Department before the close date of May 14th, 2025, however, talks with Carnegie Mellon University began during that time period and culminated in a site visit to view and assess a potentially viable site on May 30th, 2025. Please see Section 3.4 below.

2.3.2 Addition of Continuous PM_{2.5} Monitoring at Harrison Site

As was planned in prior Annual Monitoring Network Plans, a continuous PM_{2.5} monitor (Teledyne T640) was added to the Harrison monitoring station in May of 2025. This required the purchase of a new environmental shelter to house the unit, to which considerable customization of the was prototyped and performed by Air Quality Electronic Technicians to ensure proper function and safety (weatherization, stability, power, etc.). Based on the final design of this shelter, further retrofits and deployments are planned for the remainder of 2025 to install new PM_{2.5} monitors (South Fayette, Glassport) and also better secure existing continuous PM_{2.5} monitors.

3.0 Proposed Changes to the Air Monitoring Network

The following are the proposed changes to the air monitoring network beginning at the time of this plan's approval through calendar year 2026.

3.1 Proposed Monitoring Additions

3.1.1 Continuous PM_{2.5} Monitors at South Fayette and Glassport Sites

ACHD plans to proceed with the installation of continuous PM_{2.5} FEM monitors at all remaining PM_{2.5} SLAMS sites that do not currently have continuous PM_{2.5} coverage. The PM_{2.5} FEM monitors will be candidates for designation as either a primary or collocated SLAMS PM_{2.5} monitor in the network.

3.1.2 Hydrogen Sulfide Monitoring at Clairton Site

ACHD will expand continuous hydrogen sulfide (H₂S) surveillance by adding an H₂S analyzer at the Clairton monitoring site after necessary upgrades and repairs are made to the station – including a new environmental trailer. Efforts to install H₂S monitoring have been unsuccessful due to inadequate infrastructure (electrical capacity and available indoor space) at the current rooftop location.

3.1.3 Addition of Meteorology (wind speed & direction) Sensors at Avalon and Clairton site

ACHD will install a meteorology tower at the Avalon site to provide wind speed and wind direction data for the area. A similar meteorology installation will occur at the Clairton site. Efforts to install these over the last time period have been unsuccessful due to the need for a customized junction box, available parts, and personnel shortages.

3.2 Proposed Monitoring Reductions

The Department is proposing to remove PM₁₀ monitoring from the Glassport site. PM₁₀ monitoring at that site is redundant given the PM₁₀ monitoring occurring at the nearby Liberty and North Braddock sites. The site could better suit the public and network by switching to continuous PM_{2.5} monitoring, as had previously been done and shown to be successful at the Clairton site.

3.3 Proposed Monitoring Relocations/Modifications

None.

3.4 Proposed Air Monitoring Site Relocations

3.4.1 Lawrenceville Monitoring Station (NCore)

The ACHD Air Quality program relocated from the Clack Health Center Complex to the Chateau neighborhood as of November 2023. The Lawrenceville monitoring station that includes the NCore, PAMS, NATTS, IMPROVE, and CSN monitoring will need to be relocated. In the 2023 Annual Monitoring Network Plan, ACHD proposed to move all the current monitoring operations at the Lawrenceville site to 836 Fulton Street in the Chateau neighborhood bordering Manchester, which received EPA Region 3 approval. Because of potential interferences that could occur with the construction and operation of a new gas fueling station (see Section 2.3.1 above) the Department actively looked for alternative sites that could meet federal siting criteria to house the air monitoring operations currently at Lawrenceville. ACHD personnel evaluated locations in the general downwind direction of Pittsburgh's Central Business District (CBD) for a site that would provide similar pollution concentrations to the Lawrenceville site. For NCore purposes, a site is preferred at the neighborhood scale to provide representative concentrations of exposure expected throughout a metropolitan area.

One of the locations with the most potential to achieve these goals is the Hall of the Arts building on Carnegie Mellon University's campus, about 1.9 miles away from Lawrenceville, at the coordinates 40.440797 degrees latitude and -79.942613 degrees longitude. Compared to Lawrenceville, this location is nearly the same distance from the Pittsburgh CBD and is at similar elevation. It is adjacent to the Oakland neighborhoods, which include high priority areas for environmental justice. **The Department is proposing to move the NCore and related monitoring operations at Lawrenceville to this location in late 2025.**

Figures 3.1 through 3.6 below show the area served polygons for the respective NCore pollutants, if ACHD were to redeploy the Lawrenceville site to the Carnegie Mellon University campus. The potential areas served are nearly identical to those with Lawrenceville as the NCore site.

Figure 3.1 Potential Future PM_{2.5} Area Served Polygons, Allegheny County

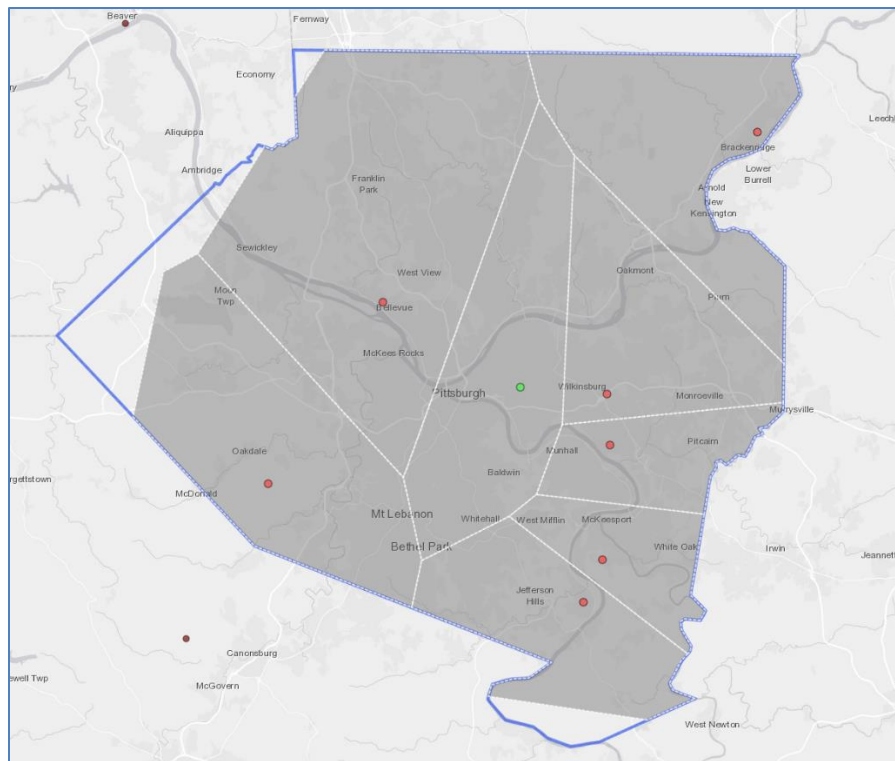


Figure 3.2 Potential Future Ozone Area Served Polygons, Allegheny County

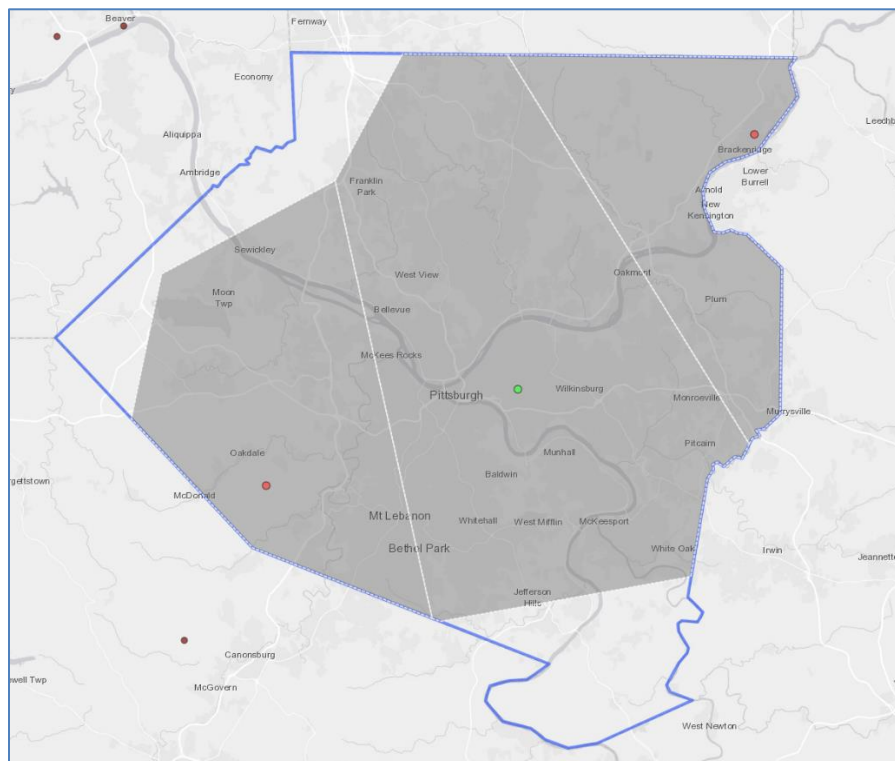


Figure 3.3 Potential Future PM₁₀ Area Served Polygons, Allegheny County

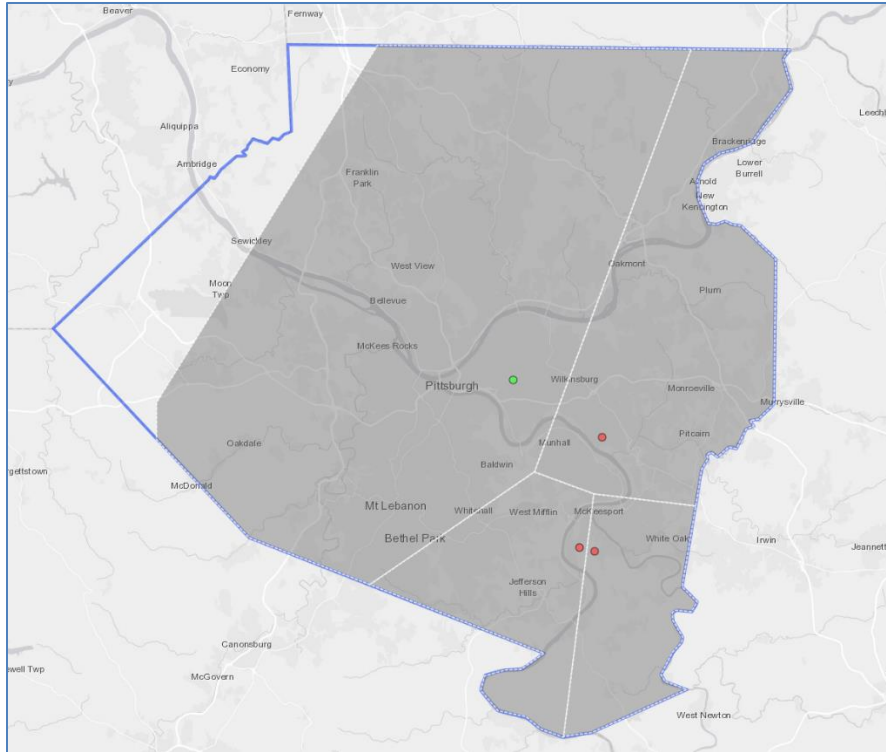


Figure 3.4 Potential Future SO₂ Area Served Polygons, Allegheny County

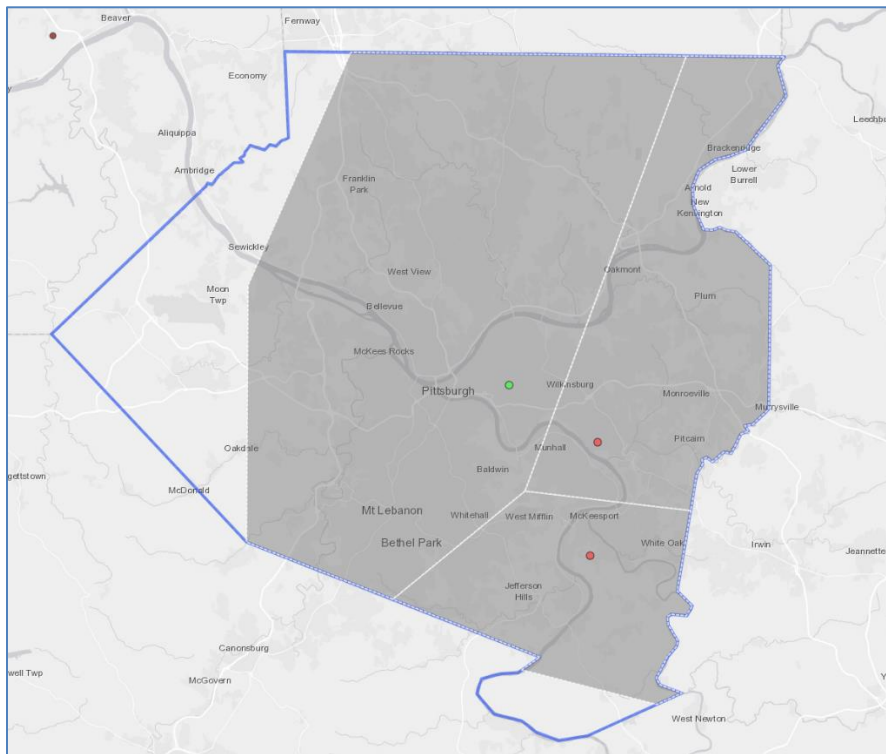


Figure 3.5 Potential Future NO₂ Area Served Polygons, Allegheny County


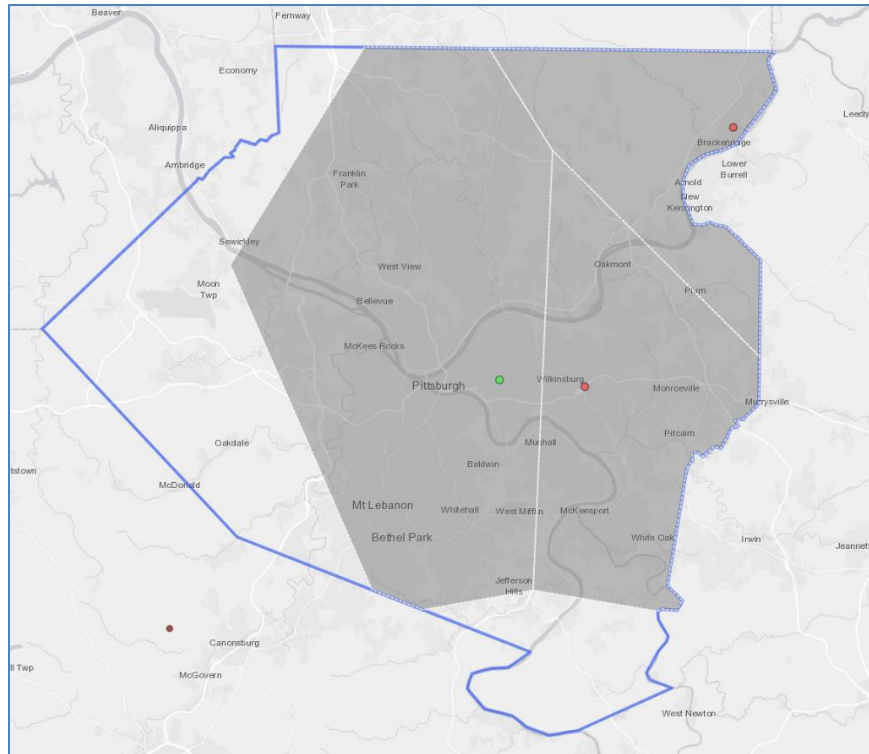


Figure 3.6 Potential Future CO Area Served Polygons, Allegheny County

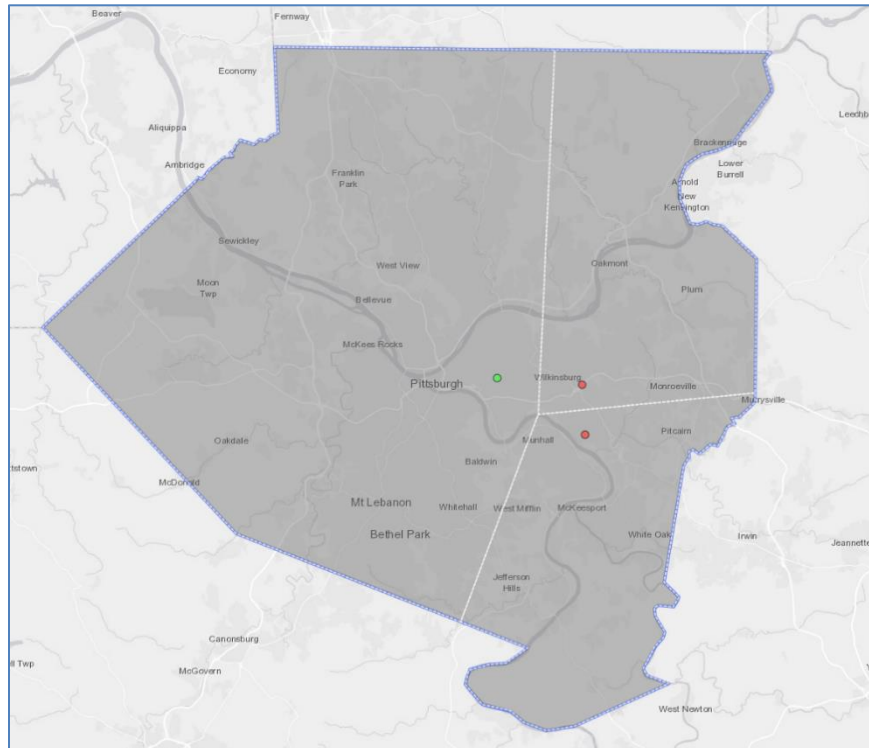

4.0 Air Monitoring Network Summary

Figure 4 and Table 4 are provided as overviews of the air monitoring network and presented here to show at a glance the numbers and general types of air monitors currently maintained by the Air Quality Program as well as the general location of each fixed monitoring site. To view live and recent data for all continuous monitors listed in the table, see the Air Quality Program website;

<https://www.alleghenycounty.us/Services/Health-Department/Air-Quality>

Figure 4 Air Monitoring Network Map

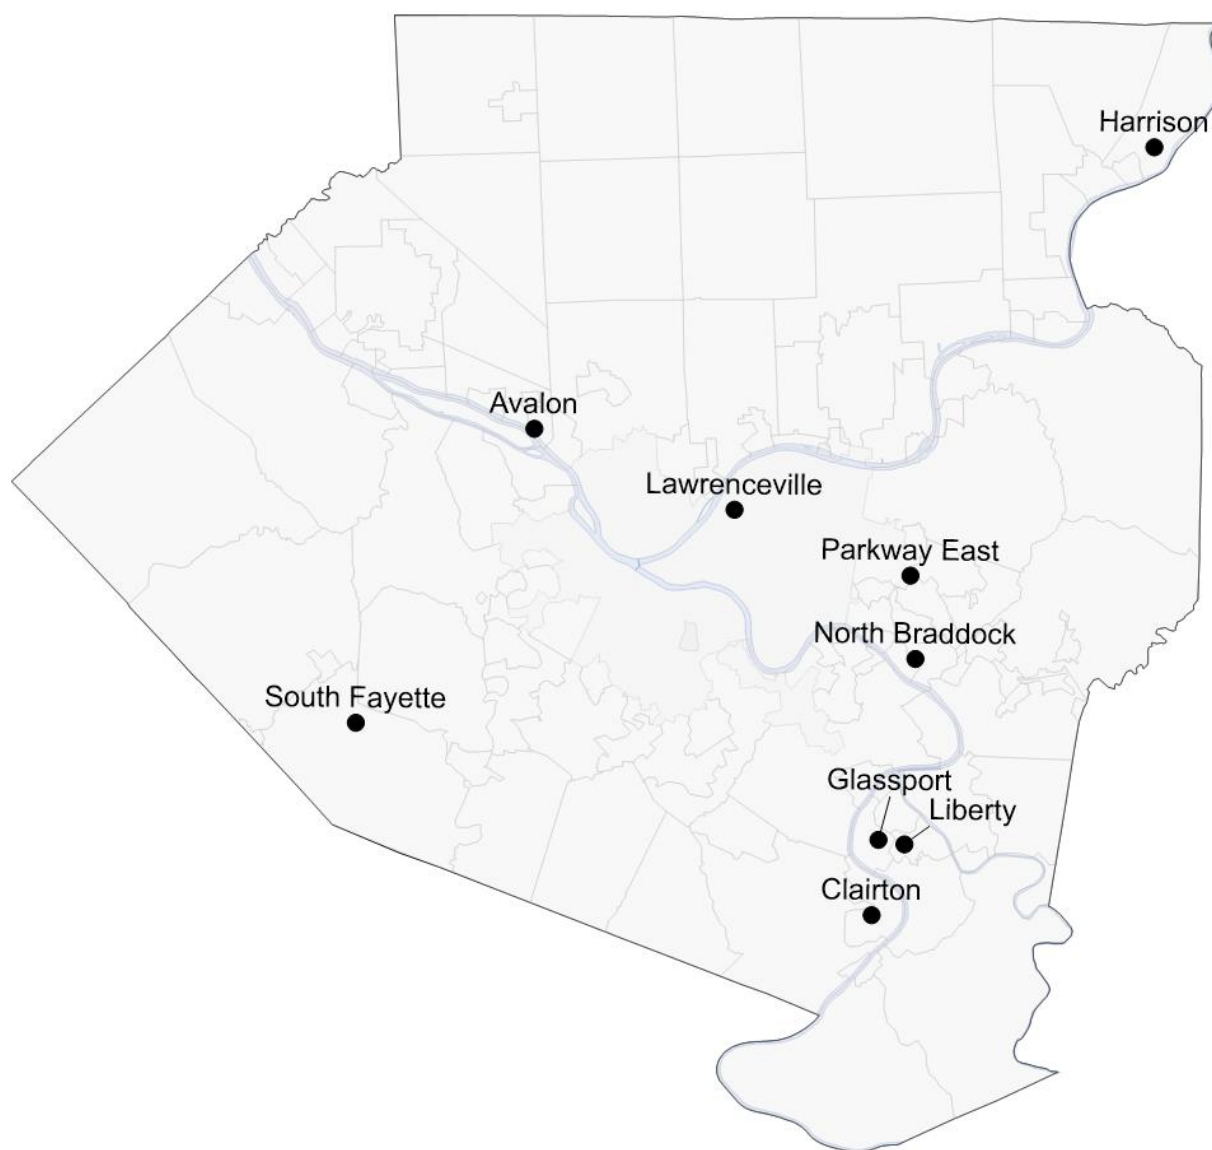


Table 4 Air Monitoring Network Summary

	SO ₂	CO	NO ₂	NO _y	O ₃	PM ₁₀	PM _{2.5}	PM coarse	Meteorology	Air Toxics
Lawrenceville NCore site	CT	CT	C	CT	C	C	C I(3) SPC(3)	C	MET	TO15(6) TO11(6) PAH M ASCENT
Carnegie Mellon University (proposed new NCore site)	CT	CT	C	CT	C	C	C I(3) SPC(3)	C	MET	TO15(6) TO11(6) PAH M ASCENT
Liberty	CT		C			C	C I(1), IQA(12) SPC(6)	C	MET	BTEX H2S
North Braddock	C	CT				C	C I(3)	C	MET	H2S
South Fayette					C		C I(3)			
Clairton	C						C		MET	H2S
Avalon							C		MET	
Glassport						C				
Harrison			C		C		C I(3)			
Parkway East (Near Road)		CT	C				C IQA(12)		MET	
Total (Current Network)	C = 2 CT = 2	CT = 3	C = 3	CT = 1	C = 3	C = 4	C = 6 I = 6 IQA = 2 SPC = 2	C = 3	MET = 4	H2S = 2 Aeth(C) = 1

Tabular Summary Key

I = Intermittent or Filter-Based; C = Continuous; SPC = PM _{2.5} Speciation; T = Trace Level Monitor
(1), (3), (6), (12) = Sampling Frequency: (1) = daily, (3) = every 3rd day, (6) = every 6th day, (12) = every 12 th day
TO15 = SUMMA VOC; TO11 = Carbonyl VOC; Aeth = Aethalometer : Black Carbon, Ultraviolet PM
QA = Collocated QA monitor; N = Non-FEM monitor (Special Study, non-regulatory use); H2S = Hydrogen Sulfide
PAH = Polycyclic Aromatic Hydrocarbons; M = PM ₁₀ Metals; BTEX = Charcoal Tube; MET = wind speed/direction
ASCENT = Aerosol Chemical Speciation Monitor, Continuous PM ₁₀ metals, Scanning Mobility Particle Sizer
Yellow Shading = Planned Monitors, Not Yet Operational; Red Shading = Candidate for Discontinuation/Relocation

5.0 Appendix A Requirements

40CFR58, Appendix A specifies the minimum quality system requirements applicable to SLAMS and other monitor types whose data are intended to be used to determine compliance with the NAAQS. ACHD is the Primary Quality Assurance Organization (PQAO) for this data set. A PQAO is also responsible for demonstrating data quality. ACHD has developed a quality system that is described and approved in quality management plans (QMP) and quality assurance project plans (QAPP). The purpose of these documents is to ensure that the monitoring results provide data of adequate quality for the intended monitoring objectives.

ACHD performs the requisite measurement quality checks that are used to assess data quality. ACHD also performs an internal second level audit as an added measure of the data quality. Data from these checks is submitted to the AQS within the same time frame as routinely-collected ambient concentration data. In addition to performing QA and QC checks, ACHD participates in external performance evaluation programs (which are independent assessments) and technical systems audit conducted by the EPA.

Regarding all data generated by the criteria pollutant monitors described in this network review, no later than May 1 of each year, ACHD submits a letter certifying accuracy and reliability of each previous calendar year's criteria air pollutant monitoring data reported to AQS to the Mid Atlantic Regional Administrator in hard copy. An electronic copy of this information will also be sent to the Mid-Atlantic Region Associate Director, Office of Air Monitoring and Planning.

ACHD's data certification will contain all required reports and will be accompanied with a statement from a responsible official who certifies that;

- All ambient concentration data and quality assurance data have been reported to the AQS database.
- The ambient data are accurate to the best of his or her knowledge taking into consideration all applicable quality assurance findings.

6.0 Appendix B Requirements

40CFR58, Appendix B specifies the minimum quality assurance requirements for the control and assessment of the quality of the ambient air monitoring data submitted to a Prevention of Significant Deterioration (PSD) reviewing authority or the EPA by an organization operating an

air monitoring station, or network of stations, operated to comply with Part 51 New Source Review (NSR) - PSD.

At present, Appendix B requirements are not applicable since there is no PSD monitoring performed by ACHD nor performed by an external PSD PQAO within the county.

7.0 Appendix C Requirements

40CFR58, Appendix C specifies the criteria pollutant monitoring methods (manual methods or automated analyzers) which must be used in SLAMS, NCORE stations (a subset of SLAMS) and PAMS (to be located at the NCORE site and considered to be another subset of SLAMS).

All criteria pollutant monitoring methods in the air monitoring network used for making NAAQS decisions at a SLAMS site are reference (FRM) or equivalent (FEM) methods. The FRM or FEM designation acceptance tests are performed by the manufacturer in accordance with the requirements of 40CFR50 and 40CFR53.

Methods employed at the Lawrenceville NCORE multipollutant site are either reference or equivalent methods. NCORE multipollutant parameters include SO₂, CO, NO_y, NO₂, O₃, PM_{2.5}, and PM_{10-2.5} (aka PM_{coarse}, Coarse PM, or PM_c). NO_y and PM_c do not have an associated NAAQS.

Methods to be employed at the Lawrenceville PAMS site are either reference or equivalent methods (where applicable). PAMS FEM monitoring parameters include O₃ and true NO₂. PAMS monitoring which do not have FEM nor FRM designation include methods for meteorological measurements and speciated VOC monitoring methodologies, which are specified in PAMS guidance documents.

- Meteorological monitoring guidance is provided in QA Handbook, Volume IV - Meteorological Measurements found at <https://www3.epa.gov/ttn/amtic/qalist.html>.
- The Compendium of Methods for the Determination of Toxic Organic (<https://www3.epa.gov/ttn/amtic/airtox.html#compendium>) can be found on EPA's website. Carbonyl sampling and analysis is based upon TO-11A and the automated gas chromatography method is based upon TO-15.

8.0 Appendix D Requirements

40CFR58, Appendix D describes monitoring objectives and general criteria to be applied in establishing the required SLAMS ambient air quality monitoring stations and for choosing general locations for additional monitoring sites. Appendix D also describes specific requirements for the number and location of FRM, FEM, and ARM sites for specific pollutants, NCORE multipollutant sites, PM₁₀ mass sites, PM_{2.5} mass sites, chemically-speciated PM_{2.5} sites, and O₃ precursor measurement sites (PAMS). These criteria are used by EPA to evaluate the adequacy of the ACHD monitoring network.

The ACHD monitoring network provides air pollution data to the public in a timely manner, supports compliance with ambient air quality standards and emissions strategy development, and supports air pollution research studies. The location of the monitors in the network were chosen to correctly match the spatial scale represented by the sample of monitored air with the spatial scale most appropriate for the monitoring site type, air pollutant to be measured, and the monitoring objective.

General monitoring requirements are based on population density of the monitoring area. For Allegheny County, the Pittsburgh MSA (metropolitan statistical area) is referenced. The latest census (2020) determined the population of the Pittsburgh MSA to be 2,370,930 people. Some monitoring requirements are also based on individual pollutant design values, which are concentrations derived from past data generated by SLAMS monitors in Allegheny County. Air Quality Design Values (DV) referenced in this section are based on tables available at:

<http://www.epa.gov/airtrends/values.html>

Each state is required to operate at least one NCORE site. States may delegate this requirement to a local agency. The NCORE location is leveraged with other multipollutant air monitoring sites including the proposed PAMS site, CSN monitoring, and monitoring performed by academia. Site leveraging includes using the same monitoring platform and equipment to meet the objectives of the variety of programs where possible and advantageous.

Pollutant specific design criteria for SLAMS sites are codified in 40CFR58, Appendix D, Section 4. EPA updates this document routinely in response to NAAQS revisions and in response to evolving air monitoring network objectives. SLAMS sites are intended to address specific air quality management interests, and as such, are frequently single-pollutant measurement sites. The following sections parallel the CFR citations and provide the current, applicable requirements for each criteria pollutant.

8.1 Ozone Design Criteria

Ozone (O₃) monitoring requirements are determined by the MSA population and ozone design value, as specified in Table D-2 of 40CFR58, Appendix D.

- Based on the population of the Pittsburgh MSA and the latest ozone design value, which is greater than 85% of the ozone NAAQS, ACHD is required to operate two ozone monitors. ACHD satisfies this requirement by operating three ozone monitors.
- Each NCORE site must operate an ozone monitor. ACHD satisfies this requirement by operating an ozone monitor at the Lawrenceville NCORE site.
- Within an ozone network, at least one ozone site for each MSA must be designed to record the maximum concentration for that metropolitan area. The maximum concentration monitor site should be selected in a direction from the city that is most likely to observe the highest ozone concentrations, more specifically, downwind during periods of photochemical activity. The Harrison monitor is assigned this designation.

Figure 8.1 Ozone Monitoring Map



8.2 Carbon Monoxide Design Criteria

EPA revised the minimum monitoring requirements for carbon monoxide (CO) on August 12, 2011 (40CFR58, Appendix D). Applicable requirements are;

- One CO monitor is required to be collocated with a near road NO₂ monitor in urban areas having a population of 1 million or more. ACHD included a CO monitor in the initial configuration of the Parkway East Near Road monitoring site, which was operational on 09/01/2014.
- One CO monitor is required at each NCORE site. ACHD has operated a trace level CO monitor at the Lawrenceville NCORE site since 4/1/2010.
- ACHD operates an additional CO monitor at the North Braddock site.

Figure 8.2 CO Monitoring Map



8.3 Nitrogen Dioxide Design Criteria

On January 22, 2010, EPA strengthened the health-based NAAQS for NO₂ by setting a new 1-hour NAAQS at 100 ppb. The existing annual average NAAQS of 53 ppb was retained. In addition, EPA revised the NO₂ monitoring requirements in urban areas. Applicable requirements are as follows;

- One near road NO₂ monitoring site is required in an MSA with a population $\geq 500,000$ and $< 2,500,000$ people. Near-road NO₂ monitoring characterizes the maximum expected hourly NO₂ concentration due to mobile source emissions on major roadways.
- One area wide NO₂ monitor in MSA's with a population > 1 million. The Harrison NO₂ monitor has been in operation at the current location since 02/12/2014.
- One true NO₂ monitor is required at a PAMS site. The Lawrenceville NCORE site performs measurements of true NO₂ and NO_y to fulfill PAMS and NCORE requirements, respectively.

Figure 8.3 Nitrogen Dioxide Monitoring Map



8.4 Sulfur Dioxide Design Criteria

The minimum number of required SO₂ monitors in each MSA is proportional to the product of the total amount of SO₂ emissions in the CBSA and its population as specified in 40CFR58, Appendix D, Section 4.4. The resulting value is defined as the Population Weighted Emissions Index (PWEI). Using the ACHD 2017 emission inventory aggregate SO₂ emissions and 2019 census estimate for the CBSA, the PWEI is calculated at 94,101. SO₂ requirements are as follows;

- For any MSA with a calculated PWEI value equal to or greater than 5,000, but less than 100,000, a minimum of one SO₂ monitor is required within that CBSA. ACHD exceeds this minimum requirement with a total of three SO₂ monitors and an upcoming fourth monitor to be installed at the Clairton site.
- Each NCORE station must operate an SO₂ monitor. ACHD included an SO₂ monitor as part of the initial configuration of the Lawrenceville NCORE site.

Figure 8.4 Sulfur Dioxide Monitoring Map



* Clairton SO₂ monitor to be installed in 2025-2026

8.5 Lead (Pb) Design Criteria

40CFR58, Appendix D, Paragraph 4.5 states that local agencies are required to conduct ambient air Pb monitoring near Pb sources which are expected to or have been shown to contribute to a maximum Pb concentration in ambient air in excess of the NAAQS, considering the logistics and potential for population exposure. At a minimum, there must be one source-oriented SLAMS site located to measure the maximum Pb concentration in ambient air resulting from each non-airport Pb source which emits 0.50 or more tons per year and from each airport which emits 1.0 or more tons per year based on either the most recent National Emission Inventory (<http://www.epa.gov/ttn/chief/eiinformation.html>) or other scientifically justifiable methods and data (such as improved emissions factors or site-specific data) taking into account logistics and the potential for population exposure.

No lead monitoring is performed in Allegheny County. Bridgeville and Lawrenceville sites were discontinued as there are no point sources which emit greater than 0.5 tons per year. EPA approval of the 2018 Annual Network Plan allowed the sampling to end after 2017.

8.6 PM₁₀ Design Criteria

The number of required PM₁₀ monitors in each MSA is determined by the MSA population and design value, as specified in Table D-4 of Appendix D to 40CFR58.

- The Pittsburgh MSA has ambient PM₁₀ concentrations well below 80% of the PM₁₀ NAAQS. Table D-4 indicates that 2 to 4 sites must monitor for PM₁₀. ACHD meets this requirement with 4 sites that monitor PM₁₀.

Figure 8.6 PM₁₀ Monitoring Map




8.7 Fine Particulate Matter (PM_{2.5}) Design Criteria

The number of required PM_{2.5} monitors in each MSA is determined by the MSA population and design value, as specified in Table D-5 of 40CFR58, Appendix D.

- Pittsburgh MSA PM_{2.5} 24 hour and annual design values are > 85% of the NAAQS, requiring a minimum of 3 PM_{2.5} sites. ACHD exceeds this requirement with 8 sites that monitor PM_{2.5}.
- Regarding FRM PM_{2.5} samplers (six sites), a minimum of 15%, or at least one, of the PM_{2.5} monitoring sites must be collocated (rounded to one). ACHD meets this requirement by having collocated monitors at the Liberty site.
- At least one site (15% is required) that features a primary PM_{2.5} FEM monitor must also operate a collocated PM_{2.5} FRM sampler (40CFR58, Appendix A). This requirement is met at the Parkway East site. Parkway East, Clairton, and Avalon have the same PM_{2.5} FEM model.
- At least one half of the minimum number of sites per MSA must operate continuous PM_{2.5} monitors, requiring ACHD to operate 2 continuous PM_{2.5} monitors. ACHD operates 7 continuous PM_{2.5} monitors (Liberty, Lawrenceville, Avalon, Parkway East, Clairton, Harrison, and North Braddock). See Section 10 for each site's detailed information.
- For MSA's above 1,000,000 people, at least one PM_{2.5} monitor must be at a near road site. ACHD conducts continuous PM_{2.5} monitoring at the Parkway East near road site.
- Each monitoring agency shall continue to conduct chemical speciation monitoring and analyses at sites designated to be part of the PM_{2.5} Speciation Trends Network (STN). ACHD continues to conduct PM_{2.5} speciation at the Liberty and Lawrenceville sites.
- Each NCORE site must monitor PM_{2.5}. ACHD satisfies this requirement at the Lawrenceville NCORE site using filter-based monitoring as well as continuous PM_{2.5} FEM monitoring.
- The required monitoring sites must be located to represent area-wide air quality. These will typically be either neighborhood or urban scale, although micro or middle scale may be appropriate in some urban areas. At least one monitoring site must be neighborhood scale or greater in an area of expected maximum concentration and one site must be sited in an area of poor air quality. At least one PM_{2.5} site must monitor for regional background and at least one PM_{2.5} site must monitor for regional transport. Table 8 shows the PM_{2.5} network site scales and objectives.

Table 8 PM_{2.5} Monitor Scales and Objectives

Site Name	Measurement Scale	Monitor Objective
Lawrenceville	Urban	Population Exposure
Liberty	Neighborhood	Population Exposure, Highest Concentration
North Braddock	Neighborhood	Population Exposure
Harrison Township	Neighborhood	Population Exposure
South Fayette	Neighborhood	Population Exposure, Regional Transport, Regional Background
Clairton	Neighborhood	Population Exposure, Welfare concerns
Avalon	Neighborhood	Population Exposure
Parkway East Near Road	Microscale	Population Exposure, Source Oriented

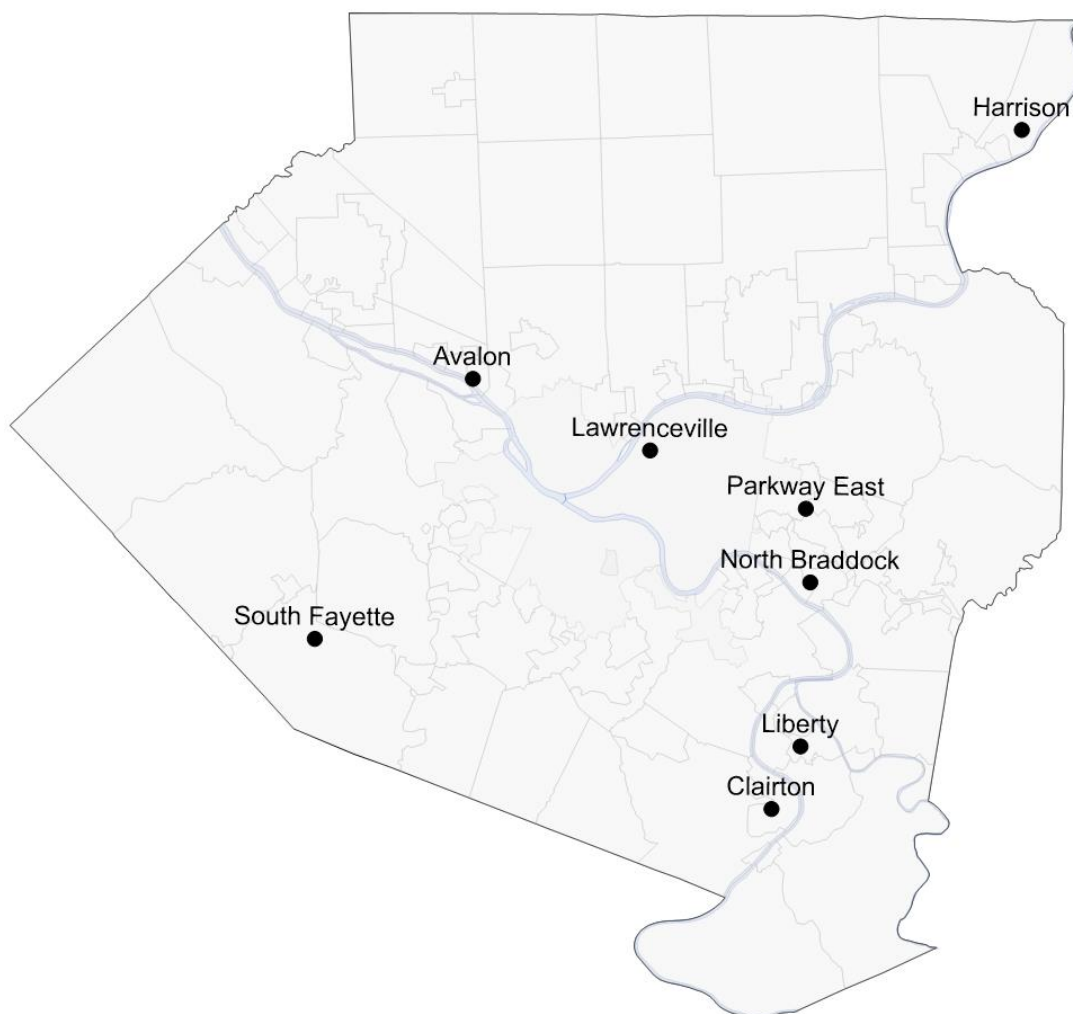Figure 8.7 PM_{2.5} Monitoring Map


8.8 Coarse Particulate Matter Design Criteria

The only required monitors for $PM_{10-2.5}$ are those required at NCORE Stations. Note that no NAAQS exists for coarse particulate matter. Coarse PM monitoring at the Lawrenceville NCORE site employs a Teledyne T640X mass monitor that uses scattered light spectrometry. The unit has designation as an approved FEM for PM_c . Coarse PM monitoring also occurs at the North Braddock and Liberty sites. ACHD only reports the $PM_{2.5}$ and PM_{10} concentrations at those additional sites.

8.9 Meteorological Monitoring

The meteorological stations can show unique wind patterns at the different local sites and can be useful for modeling, source culpability, and other studies. Only two of the local sites, Lawrenceville and Parkway East, are required to have meteorological measurements as part of national networks. ACHD maintains additional meteorological measurements at the Liberty and North Braddock sites.

Figure 8.9 Allegheny County Meteorological Map (Surface Wind Roses 2020-2024)

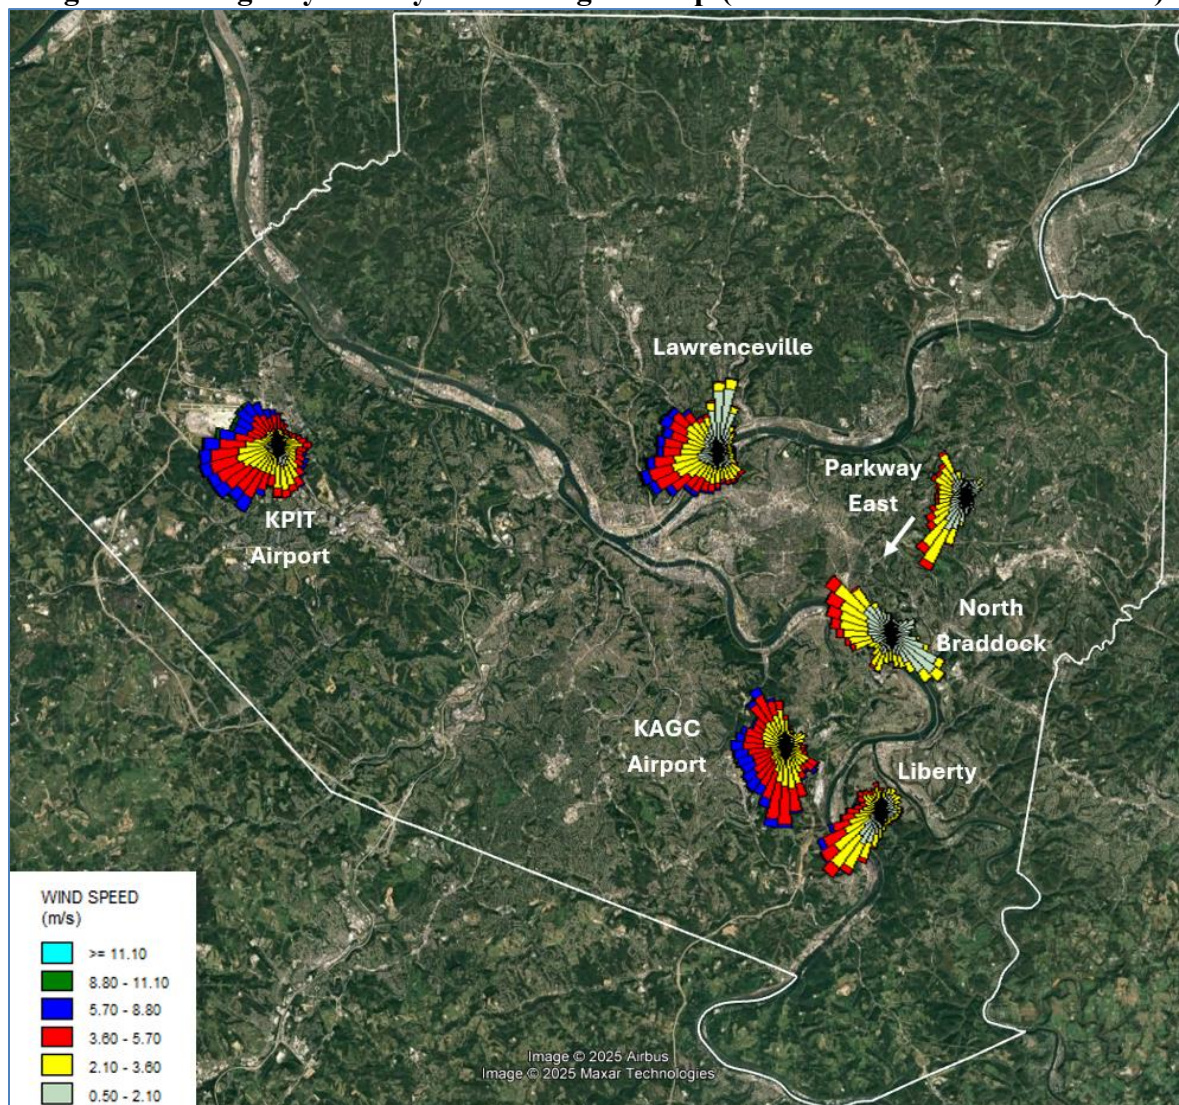

9.0 Appendix E Requirements

40CFR58, Appendix E contains specific location criteria applicable to SLAMS, NCORE, and PAMS ambient air quality monitoring probes, inlets, and optical paths after the general location has been selected, based on the monitoring objectives and spatial scale of representation discussed

in Appendix D. Adherence to these siting criteria is necessary to ensure the uniform collection of compatible and comparable air quality data.

Appendix E specifies probe and monitoring path siting criteria for ambient air quality monitoring. The key components of Appendix E include the following:

- Horizontal and Vertical Placement
- Spacing from Minor Sources
- Spacing from Obstructions
- Spacing from Trees
- Spacing from Roadways
- Cumulative Interferences on a Monitoring Path
- Maximum Monitoring Path Length
- Probe Material and Pollutant Sample Residence Time
- Waiver Provisions.

Discussion of Appendix E requirements will be contained in the next section.

10.0 Detailed Air Monitoring Site Descriptions

The following air monitoring network description discusses each monitoring site in detail. The first information block is labeled with the site name. Inside of the block is listed site specific information as follows:

- **Street Address**
- **AQS #** - unique 9-digit number used to identify the state, county and site in the AQS data base
- **Municipality** – where site is located
- **MSA** – Metropolitan Statistical Area
- **Latitude (N), Longitude (W)** – Site coordinates, given in WGS84 datum coordinates
- **Comments** – Specific site information of importance

The next blocks are designed to list details of each monitor at the site. Each monitor present at the time of the review is assigned its own block. The following information is listed:

Sensor Type – The name of the pollutant measured by the sampler and to provide further detail, FEM or FRM designation.

Sensor Network Designation – The name of the designated network:

- SLAMS – State or Local Ambient Air Monitoring Station that has EPA reference or equivalent method designation, including Primary, Secondary or Tertiary level of importance, where more than one sensor type is at the site. Waiver provisions.
- OTHER – Monitor that does not have EPA designated reference or equivalent status.

Sensor Purpose Description – The purpose of the sensor:

- Population Exposure, such as the Air Quality Index
- Regulatory Compliance with Federal or State regulation
- Research/Scientific Monitoring
- Specific Location Characterization
- Quality Assurance (Collocated)

Sample Frequency – Specifies how often a sample is taken.

- Continuous (also referred to as “Hourly”) – operates 24/7; applies predominately to gaseous analyzers, although some particulate samplers (TEOM, T640, T640X) operate continuously.
- Daily – a discrete sample is taken every day; applies to manual method particulate or toxics samplers.
 - Every Third Day – Manual method samplers that run every third day.
 - Every Sixth Day – Manual method or toxics samplers that run every sixth day.
 - Every Twelfth Day – Manual method QA samplers that run every twelfth day.

Appendix A QA Assessment – A “YES” indicates the sensor is maintained in accordance with the Quality Assurance (QA) requirements specified in 40CFR58, Appendix A.

Monitor Start Date – Specifies the start date for the current AQS pollutant parameter code. Note that AQS method codes may change, usually due to a change of manufacturer or monitor model employed at the site.

Appendix C Monitoring Classification – Each ambient air monitor is classified using the EPA “List of Designated Reference and Equivalent Methods”:

- Reference Method – a method of sampling that is specified in 40CFR53.
- Equivalent Method – a method that is designated as equivalent to the reference method, in accordance with 40CFR53 and 40CFR50.
- Automated – after sampling, the analysis results are available immediately.
- Manual – after sampling, a separate analysis at a laboratory is necessary.
- N/A – appears where there is no reference or equivalent method.

Appendix C Monitoring Method – Each ambient air monitor is classified by a specific method number.

Monitoring Method Description – Table 10 provides details about each type of sampler and analyzer utilized in the air monitoring network.

Probe Height – Distance from ground level that ambient air is sampled. 40CFR58, Appendix E lists acceptable probe heights for individual measurement parameters and spatial scales.

Residence Time – The amount of time that ambient air remains in contact with a probe line or manifold, considering total manifold and probe line inner volume and monitor flow rate. Residence time is applicable to reactive gas monitors that use probe lines or manifolds to deliver ambient air to the monitor. Section 7.2.1 of the QA Handbook Volume II recommends a probe residence time of ten seconds or less as optimal and over 20 seconds as unacceptable due to sample concentration loss at higher residence times.

Appendix D Design Criteria – Appendix D requires a certain number of samplers per geographic area. A “YES” indicates that the number of monitors in that area meets or exceeds the requirement of 40CFR58, Appendix D.

Appendix D Scale – The specific “spatial scales of representation” describes the physical dimensions of the air parcel around the monitoring station throughout which actual pollutant concentrations are reasonably similar.

- Microscale – Areas with dimensions up to about 100 meters.
- Middle scale – Areas with dimensions from 100 meters to 0.5 kilometers.
- Neighborhood – Areas with dimensions from 0.5 to 4.0 kilometers and uniform land use.
- Urban scale – Areas with dimensions from 4 to 50 kilometers.
- Regional – Areas with dimensions ranging from tens to hundreds of kilometers and usually a rural area of reasonably homogeneous geography without large sources.
- National and Global Scales – Measurement scales that represent concentrations characterizing the nation and the globe.

Appendix D Objective – Describes the purpose/objective for monitoring at a site.

- Extreme Downwind
- General/Background Concentration
- Highest Concentration

- Maximum Ozone Concentration
- Maximum Precursor Emissions
- Population Exposure
- Regional Transport
- Source Oriented
- Quality Assurance
- Welfare Related

Appendix E Siting Criteria – Describes certain criteria applicable to ambient air quality sampling probes and monitoring paths, such as distances from trees, obstructions, traffic lanes, etc. A “YES” indicates that the sensor at the given site meets or exceeds the requirements of 40CFR58, Appendix E.

Table 10 Monitoring Parameters and Methods

Parameter	Mfg	Model #	Parameter Code	Method Code	Description
PM _{2.5} FRM	R&P	2025	88101	145	Low Volume Sampler (filter) VSCC, very sharp cut cyclone
PM _{2.5} FEM					
	Teledyne API	T640	88101	636	Broadband Spectroscopy
	Teledyne API	T640X	88101	638	Broadband Spectroscopy

PM ₁₀ FRM	Tisch	TE-6070	81102	141	High Volume Sampler (filter)
PM ₁₀ FEM	R&P	1400	81102	79	Gravimetric Instrumental (TEOM)
	Teledyne API	T640X	81102	639	Broadband Spectroscopy
PM _{2.5} Speciation	Met One SASS	SASS	multiple	812	Trace metals, Sulfate, Nitrate
	URG	3000N	multiple	812	Organic/Inorganic Carbon
PM coarse	Teledyne API	T640X	86101	640	Broadband Spectroscopy
Carbon Monoxide	TAPI	300A/E	42101	93	Gas Filter Correlation
Carbon Monoxide (trace)	TAPI	300 EU	42101	593	Gas Filter Correlation
Nitrogen Dioxide (true)	Teledyne API	N500	42602	256	Cavity-Attenuated Phase-Shift (CAPS) spectroscopy
Reactive Oxides of Nitrogen (Noy)	TAPI	200EU/501	42600	699	Chemiluminescence
Sulfur Dioxide					
	TAPI	100E	42401	77	Ultra Violet Fluorescence
Sulfur Dioxide (trace)	Teledyne API	100EU / 100U	42401	600	Pulsed Fluorescence
Ozone	Thermo	49	44201	47	Ultraviolet Absorption
Black Carbon	TAPI	633	84313	894	Aethalometer Instrumental
Air Toxics (VOC)	ATEC	2200	multiple	150	6-liter SS canister / TO-15 lab analysis
AIR Toxics (Carbonyl)	ATEC	2200/8000	multiple	102	DNPH cartridge / TO-11 lab analysis
Air Toxics (PM ₁₀ Metals)	Tisch	TE-6070	Multiple		High Volume Sampler (filter)
Air Toxics (PAHs)	Tisch	TE-1000	Multiple		High Volume Sampler (PUF)
Air Toxics (hourly VOC)	CAS	Chromatotec AirmOzone	Multiple		Auto-Gas Chromatograph w/ Flame Ionization Detection
Mixing Height	Vaisala	CL-51	Multiple		High Range Ceilometer
Wind Speed/Direction	Met One	50.5	61101/61102	068	Sonic Anemometer
Wind Speed/Direction	Vaisala	WXT – 536	61101/61102	060	Sonic Anemometer
Rainfall	Met One	375	65102	013	Tipping bucket
Relative Humidity	Met One	083E	62201	061	Electronic RH Sensor
Solar / UV Radiation	Met One	094-1/6676	63301/63302	011	Electronic Sensors
Ambient Temperature	Met One	083E	62101	061	Electronic Temperature Sensor

10.1 Lawrenceville

Address	Allegheny County Health Department 301 39 th Street, Building 7 Pittsburgh, PA 15201		
AQS#	42-003-0008	MSA	Pittsburgh
Latitude (N)	40.465420	Longitude (W)	-79.960757
Comments	This is a population-based, community-oriented monitoring site that is an urban area downwind of Central Business District. The Lawrenceville monitoring site was selected as a PM _{2.5} National Trends Site, later as an NCORE site and as the proposed PAMS site in 2019.		

	The most significant local pollution is generated from mobile sources, but light industry scattered throughout the area is also a contributing factor. Lawrenceville is a core PM _{2.5} site that is used to determine compliance with national standards.		
--	---	--	--

Sensor Type	Ozone	Appendix C Method Code	47
Network Designation	SLAMS	Probe Height Residence Time	12 Meters 4.9 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/1/1978	Appendix E Siting Criteria	Yes

Sensor Type	PM_{10-2.5} (coarse)	Appendix C Method Code	640
Network Designation	Other / (NCORE)	Probe Height	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	4/1/2011	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS Primary	Probe Height	12 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Every 3 Days	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	02/23/1999	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} FEM	Appendix C Method Code	638
Network Designation	SLAMS Secondary	Probe Height	12 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	08/07/2015	Appendix E Siting Criteria	Yes

Sensor Type	PM₁₀ FEM	Appendix C Method Code	639
Network Designation	SLAMS Primary	Probe Height	12 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	01/01/2022	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} Speciation	Appendix C Method Code	812
Network Designation	Other (CSN)	Probe Height (m)	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	Yes
Sample Frequency	Every Three Days	Appendix D Scale	Not Assigned
Appendix A QA Assessment	Yes	Appendix D Objectives	Unknown
Monitor Start Date	6/30/2001	Appendix E Siting Criteria	Yes

Sensor Type	Carbon Monoxide	Appendix C Method Code	593
Network Designation	SLAMS	Probe Height Residence Time	12 Meters 8.9 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	4/1/2010	Appendix E Siting Criteria	Yes

Sensor Type	Sulfur Dioxide	Appendix C Method Code	600
Network Designation	SLAMS	Probe Height Residence Time	12 Meters 13.5 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	4/1/2010	Appendix E Siting Criteria	Yes

Sensor Type	Total Reactive Oxides of Nitrogen (NO_x)	Appendix C Method Code	699
-------------	---	------------------------	-----

Network Designation	Other (NCORE)	Probe Height Residence Time	12 Meters 13.1 Seconds
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	4/2/2010	Appendix E Siting Criteria	Yes

Sensor Type	Nitrogen Dioxide (True NO₂)	Appendix C Method Code	256
Network Designation	Other (Photochemical Assessment Monitoring Station)	Probe Height Residence Time	12 Meters 13.1 Seconds
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date		Appendix E Siting Criteria	Yes

Sensor Type	PM₁₀ Metals (See Section A2.1)	Appendix C Method Code	N/A
Network Designation	Other (National Air Toxics Trends Station)	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Every Six days	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	8/19/2020	Appendix E Siting Criteria	Yes
Sensor Type	Volatile Organic Compounds (See Section A2.1)	Appendix C Method Code	N/A
Network Designation	Other (National Air Toxics Trends Station)	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Every Six days	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	8/19/2020	Appendix E Siting Criteria	Yes

Sensor Type	Carbonyls	Appendix C Method Code	N/A
Network Designation	Other (NATTS: year-round) Other (PAMS 6/1 – 8/31)	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D	N/A

		Design Criteria	
Sample Frequency	Every Six days (NATTS) Every Three days (PAMS)	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	8/19/2020	Appendix E Siting Criteria	Yes

Sensor Type	Polycyclic Aromatic Hydrocarbons	Appendix C Method Code	N/A
Network Designation	Other (National Air Toxics Trends Station)	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Every Six days	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	8/19/2020	Appendix E Siting Criteria	Yes

Sensor Type	Volatile Organic Compounds	Appendix C Method Code	N/A
Network Designation	Other (Photochemical Assessment Monitoring Station)	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Hourly during PAMS season (June 1 – August 31)	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	6/1/2021	Appendix E Siting Criteria	Yes

Sensor Type	Aerosol Chemical Speciation Monitor (ACSM)	Appendix C Method Code	N/A
Network Designation	ASCENT	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	7/1/2023	Appendix E Siting Criteria	Yes

Sensor Type	Xact PM_{2.5} Metals	Appendix C Method Code	N/A
Network Designation	ASCENT	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A

Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	7/1/2023	Appendix E Siting Criteria	Yes

Sensor Type	Scanning Mobility Particle Sizer (SMPS)	Appendix C Method Code	N/A
Network Designation	ASCENT	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	7/1/2023	Appendix E Siting Criteria	Yes

Sensor Type	Aethalometer	Appendix C Method Code	N/A
Network Designation	ASCENT	Probe Height Residence Time	12 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	7/1/2023	Appendix E Siting Criteria	Yes

Lawrenceville Meteorological Sensors

- Wind Speed / Wind Direction (scalar & resultant)
- Solar Radiation
- Total UV Radiation
- Relative humidity
- Barometric Pressure
- Rain/Snow amounts
- Ambient Temperature
- Mixing Height (ceilometer)

Lawrenceville Area Information

Street Name	Traffic Count (AADT)
39 th Street (20 m)	Unavailable
Penn Avenue (86 m)	7,785 (PennDot 2015)


Butler Street (343 m)		7,371 (PennDot 2014)
Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)	
North	Residential	
East	Residential	
South	Residential	
West	Residential	

Direction	Obstructions	Height (m)	Distance (m)
North			
East			
South	Wall	1	2 to 3 m
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North		Flat
East		Flat
South		Flat
West		Flat

Figure 10.1.1 Lawrenceville Location Map

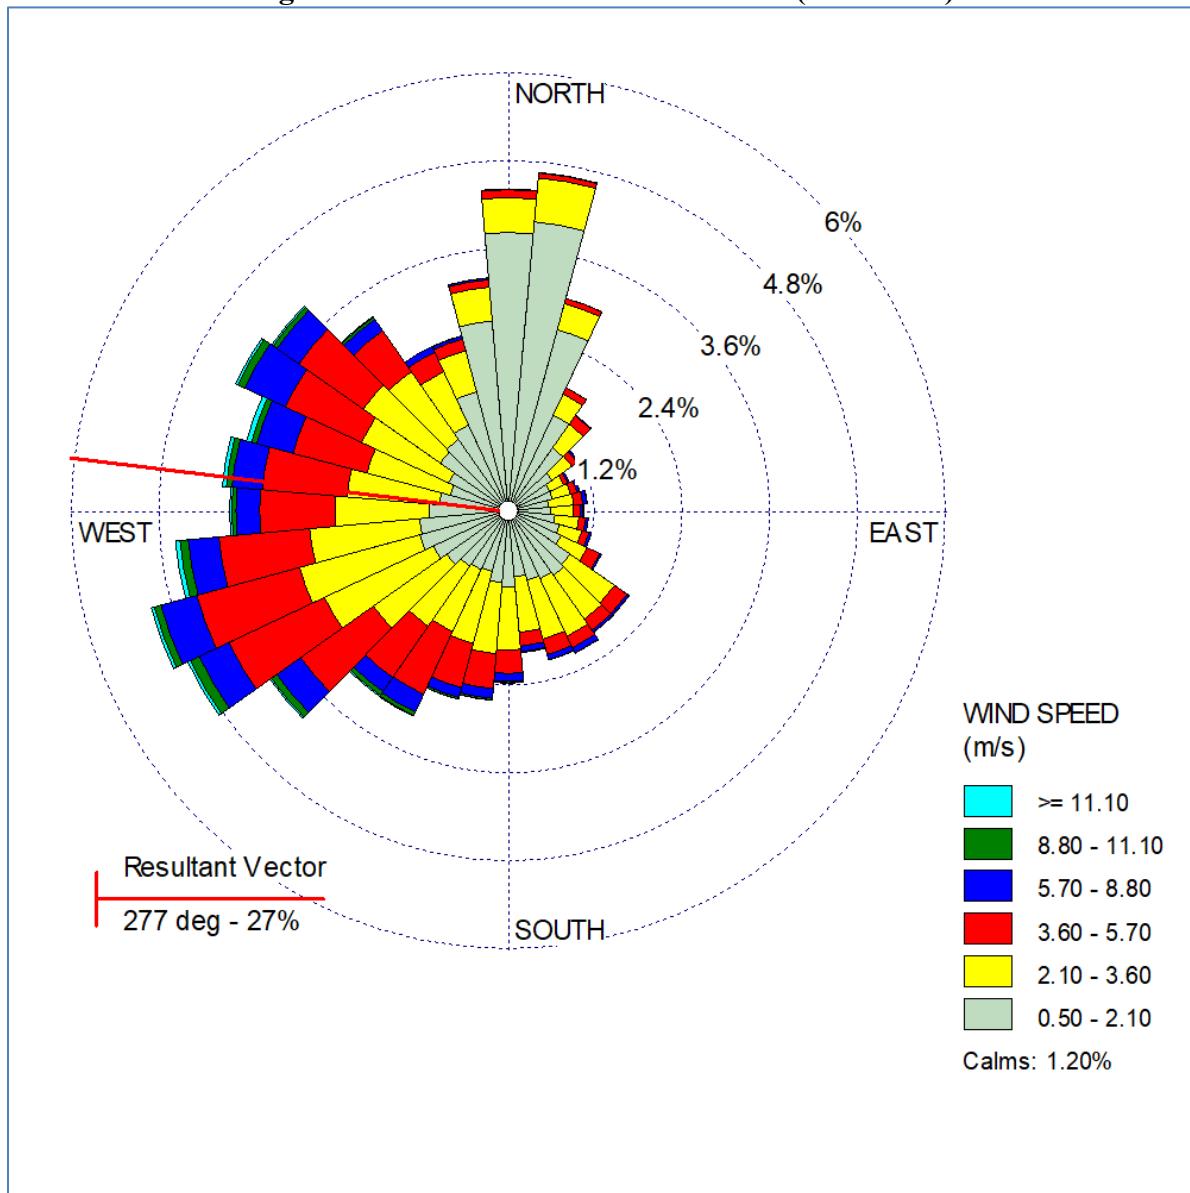

Figure 10.1.2 Lawrenceville Wind Rose (2020-2024)**10.2 Liberty**

Address	South Allegheny High School 2743 Washington Blvd McKeesport, PA 15133		
AQS#	42-003-0064	MSA	Pittsburgh
Latitude (N) Particulate and BTEX	40.323761	Longitude (W) Particulate and BTEX	-79.868151
Latitude (N) SO ₂ , H ₂ S	40.324759	Longitude (W) SO ₂ , H ₂ S	-79.867030
Comments	<p>This site is in a suburban area about 3 km north-northeast (and primarily downwind) of the US Steel Clairton Coke Works. The area around this monitoring site has a long history of higher-than-average levels of PM_{2.5}, PM₁₀, and sulfur dioxide. Significant ambient levels of benzene have also been measured and documented at this site. Liberty is a core PM_{2.5} site that is used to determine compliance with national standards.</p> <p>At the request of US Steel, telemetry devices have been installed on the PM₁₀, PM_{2.5}, and SO₂ monitors that transmit continuous readings via radio signals to a location within the US Steel facility. Other transmitters are also in use: Glassport PM₁₀ monitor and North Braddock SO₂ monitor and sonic anemometer. This real-time data allows the opportunity for US Steel to minimize fugitive emissions and to adjust production levels to keep particulate levels and gaseous emissions within allowable ambient levels in downwind communities.</p>		

Sensor Type	PM _{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS Primary	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Daily	Appendix D Scale	Neighborhood, Highest Concentration
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/23/1999	Appendix E Siting Criteria	Yes

Sensor Type	PM _{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS Secondary	Probe Height	8 Meters
Purpose	QA/Co-located Monitor	Appendix D Design Criteria	Yes
Sample Frequency	Every Twelve Days	Appendix D Scale	Neighborhood, Highest Concentration
Appendix A QA Assessment	Yes	Appendix D Objectives	Quality Assurance
Monitor Start Date	1/1/2005	Appendix E Siting Criteria	Yes

Sensor Type	PM _{2.5} FEM	Appendix C Method Code	638
Network Designation	SLAMS Tertiary	Probe Height	8 meters

Purpose	QA/Co-located Monitor AQI Reporting	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood, Highest Concentration
Appendix A QA Assessment	Yes	Appendix D Objectives	Neighborhood, Highest Concentration
Monitor Start Date	11/01/2017	Appendix E Siting Criteria	Yes

Sensor Type	PM₁₀ FEM	Appendix C Method Code	639
Network Designation	SLAMS Primary	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/1/1992	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} Speciation	Appendix C Method Code	Multiple
Network Designation	Other (CSN)	Probe Height	8 Meters
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	Yes
Sample Frequency	Every Six Days	Appendix D Scale	Unassigned
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	10/6/2003	Appendix E Siting Criteria	Yes

Sensor Type	Sulfur Dioxide	Appendix C Method Code	600
Network Designation	SLAMS	Probe Height Residence Time	8 Meters 11.5 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/1/1969	Appendix E Siting Criteria	Yes

Sensor Type	Hydrogen Sulfide	Appendix C Method Code	N/A
Network Designation	Special Purpose monitor	Probe Height Residence Time	8 Meters 11.5 Seconds
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A

Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	1/1/1981	Appendix E Siting Criteria	Yes

Sensor Type	BTEX / Sorbent Tube See Section A3.1	Appendix C Method Code	N/A
Network Designation	Special Purpose Monitor	Probe Height Residence Time	8 Meters 3.1 Seconds
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Every Three Days	Appendix D Scale	Undetermined
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	2/1/2014	Appendix E Siting Criteria	Yes

Liberty Meteorological Sensors

- Wind Speed / Wind Direction
- Ambient Temperature
- Barometric Pressure

Liberty Area Information


Street Name	Traffic Count (AADT)
Washington Blvd. (283 m)	2080 (PennDot 2013)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential
West	Residential

Direction	Obstructions	Height (m)	Distance (m)
North			
East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North	Valley	Rough
East		Rolling
South	Valley	Rolling
West	River	Rolling

Figure 10.2.1 Liberty Location Map**Figure 10.2.2 Liberty Wind Rose (2020-2024)**

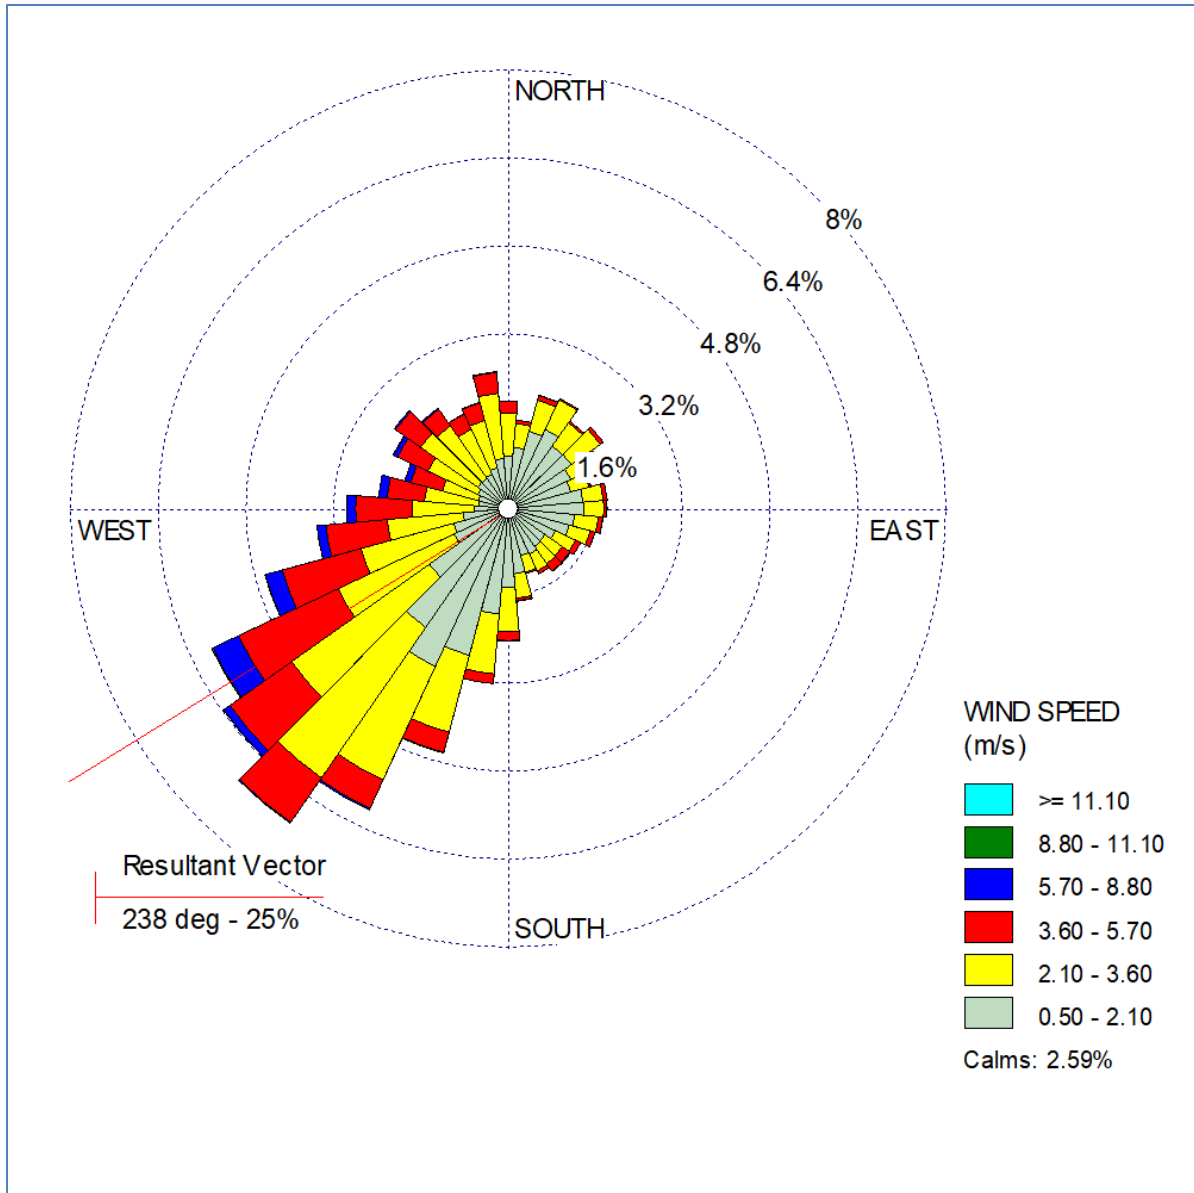

10.3 Glassport

Address	Water Tower on High Street Glassport, PA 15045		
AQS#	42-003-3006	MSA	Pittsburgh
Latitude (N)	40.326008	Longitude (W)	-79.881703
Comments	Located in a residential area, this site is population oriented and is impacted by the US Steel Clairton Coke Works, the Irvin Works, and other sources in the Monongahela river valley. Glassport High Street is the site of the County's last documented exceedance of the federal 24-hour PM ₁₀ standard of 150 µg/m ³ (October 1997).		

Sensor Type	PM ₁₀ FEM	Appendix C Method Code	79
Network Designation	SLAMS	Probe Height	2 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/6/1995	Appendix E Siting Criteria	Yes

Glassport Area Information

Street Name	Traffic Count (AADT)
High Street (8m)	Unavailable
Scenic Street (53m)	Unavailable
Washington Blvd (140m)	2080 (PennDot 2013)
Pacific Ave. (202m)	4450 (PennDot 2012)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential
West	Residential


Direction	Obstructions	Height (m)	Distance (m)
North	Water Tower	25	9
East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North		Flat
East		Flat
South		Flat
West	Valley	Flat

Figure 10.3.1 Glassport Location Map



Figure 10.3.2 Liberty, Glassport and Clairton Stations Map

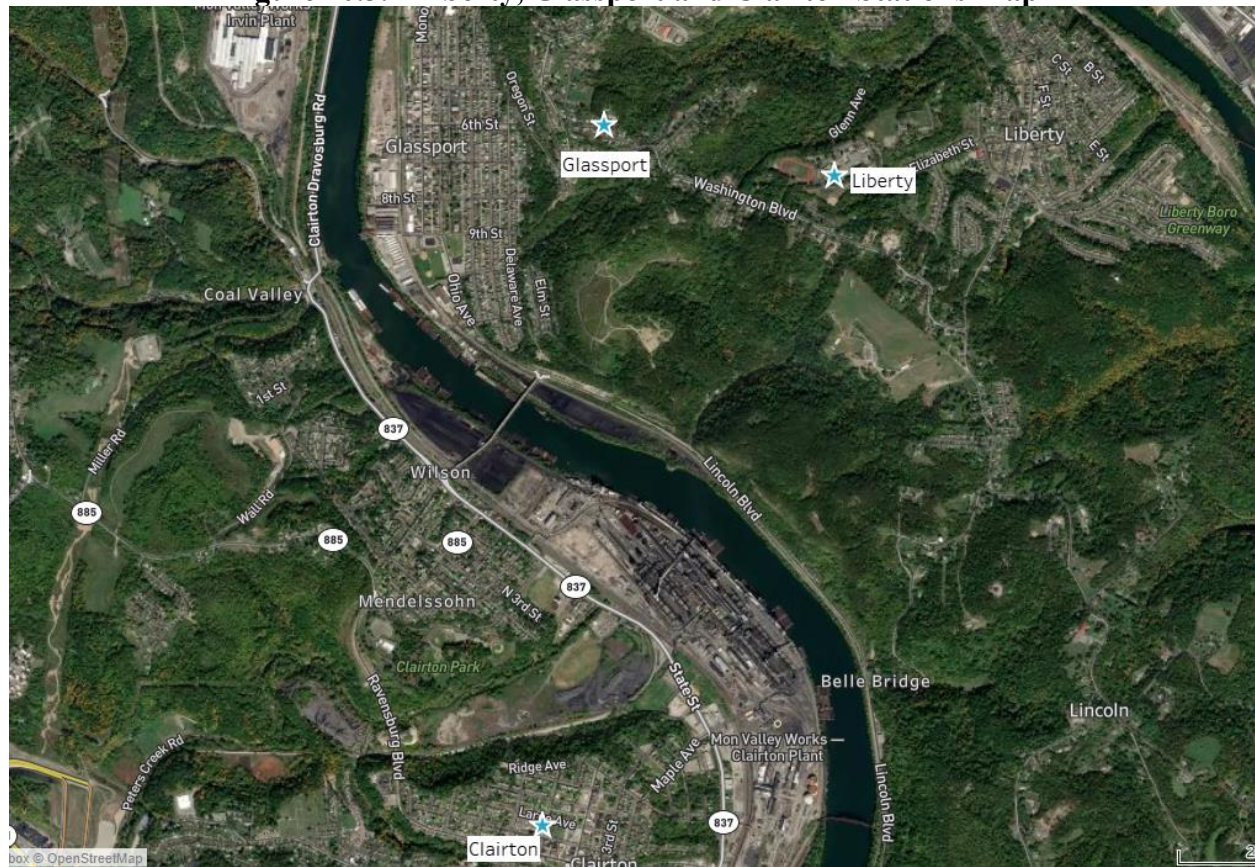

10.4 North Braddock

Address	North Braddock Borough Building 600 Anderson Street Braddock, PA 15104		
AQS#	42-003-1301	MSA	Pittsburgh
Latitude (N)	40.402328	Longitude (W)	-79.860973
Comments	This suburban site is population oriented. The area around this site is impacted by the US Steel Edgar Thomson Works, which is a basic steel production facility located about 1.5 km south-southwest from the monitoring site. North Braddock is a core PM _{2.5} site that is used to determine compliance with national standards.		

Sensor Type	PM_{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS Primary	Probe Height	7 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Every Three Days	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/30/1999	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} FEM	Appendix C Method Code	638
Network Designation	SLAMS Secondary	Probe Height	7 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/1/2022	Appendix E Siting Criteria	Yes

Sensor Type	PM₁₀ FEM	Appendix C Method Code	639
Network Designation	SLAMS	Probe Height	7 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	1/1/2011	Appendix E Siting Criteria	Yes
Sensor Type	Sulfur Dioxide	Appendix C Method Code	600

Network Designation	SLAMS	Probe Height Residence Time	7 Meters 14.4 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Highest Concentration
Monitor Start Date	1/1/2014	Appendix E Siting Criteria	Yes

Sensor Type	Carbon Monoxide	Appendix C Method Code	93
Network Designation	SLAMS	Probe Height Residence Time	7 Meters 14.4 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date		Appendix E Siting Criteria	Yes

Sensor Type	Hydrogen Sulfide	Appendix C Method Code	N/A
Network Designation	Special Purpose monitor	Probe Height Residence Time	7 Meters 11.5 Seconds
Purpose	Research/Scientific Monitoring	Appendix D Design Criteria	N/A
Sample Frequency	Hourly	Appendix D Scale	N/A
Appendix A QA Assessment	N/A	Appendix D Objectives	N/A
Monitor Start Date	12/9/2020	Appendix E Siting Criteria	Yes

North Braddock Meteorological Sensors

- Wind Speed / Wind Direction
- Ambient Temperature
- Barometric Pressure

North Braddock Area Information

Street Name	Traffic Count (AADT)
Bell Avenue (13 m)	2882 (PennDot 2012)
Anderson St. (40 m)	Unavailable
Braddock Ave. (370 m)	6349 (PennDot 2015)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential, Industry
West	Residential

Direction	Obstructions	Height (m)	Distance (m)
North			
East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North	Hills	Rolling
East	Hills	Rolling
South	River	Rolling
West		Rolling

Figure 10.4.1 North Braddock Location Map

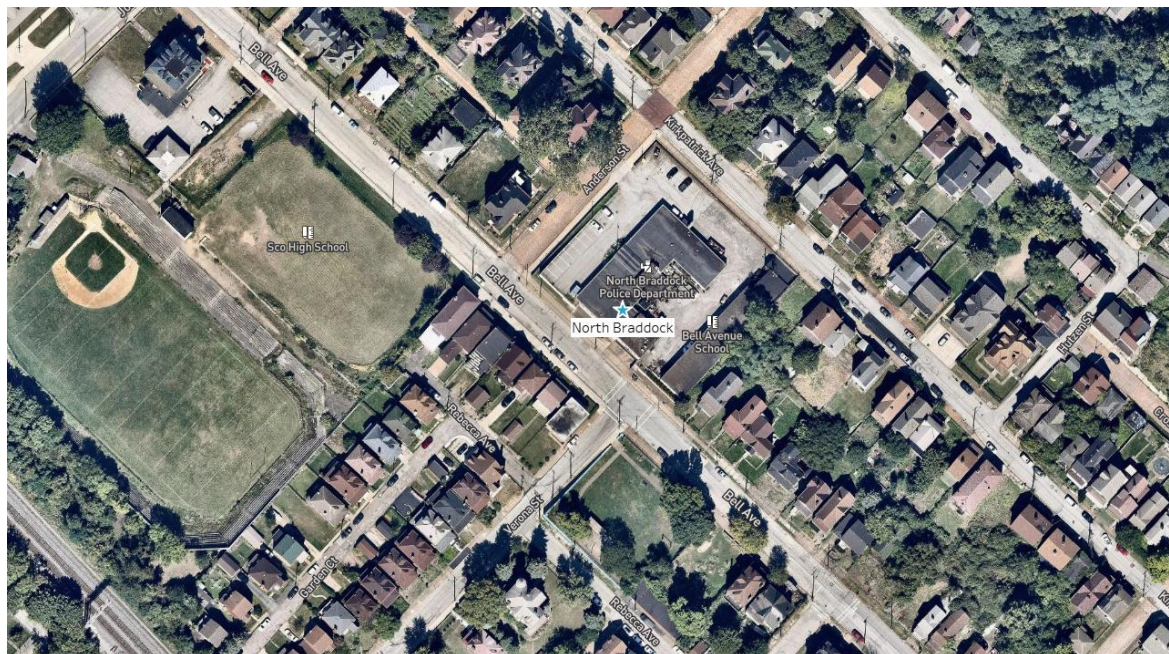
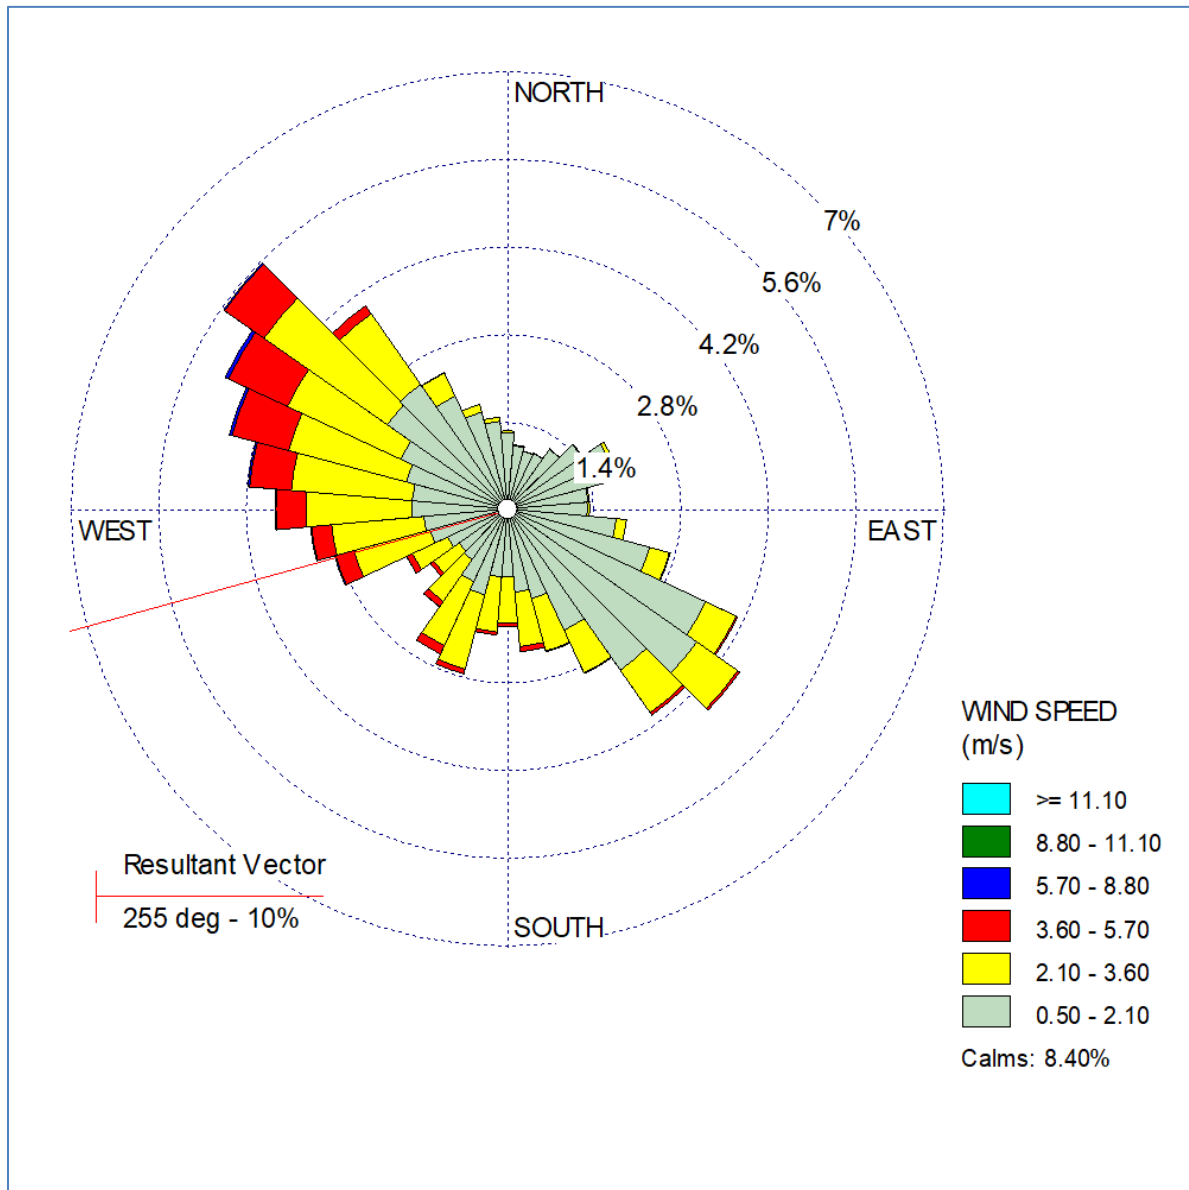


Figure 10.4.2 North Braddock Wind Rose (2020-2024)

10.5 Harrison

Address	Highlands Senior High School 1500 Pacific Avenue Natrona Heights, PA 15065		
AQS#	42-003-1008	MSA	Pittsburgh
Latitude (N)	40.617488	Longitude (W)	-79.727664
Comments	This suburban site is population-based and community oriented. This is a core PM _{2.5} site used to determine compliance with national standards. This ozone monitoring site is positioned downwind of the Pittsburgh Central Business District and is expected to demonstrate maximum ozone concentrations. The nitrogen oxides monitor adds significant value to the ozone data and was upgraded to read True NO ₂ concentrations in 2022.		

Sensor Type	PM_{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Every Three Days	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	2/13/1999	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} FEM	Appendix C Method Code	636
Network Designation	SLAMS Secondary	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Welfare Concerns
Monitor Start Date	5/2025	Appendix E Siting Criteria	Yes

Sensor Type	Ozone	Appendix C Method Code	47
Network Designation	SLAMS	Probe Height Residence Time	10 Meters 4.9 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Urban
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Highest Concentration
Monitor Start Date	2/12/2014	Appendix E Siting Criteria	yes

Sensor Type	Oxides of Nitrogen + True NO₂	Appendix C Method Code	256
Network Designation	SLAMS	Probe Height Residence Time	10 Meters 14.7 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	2/12/2014	Appendix E Siting Criteria	Yes

Harrison Area Information

Street Name / Distance	Traffic Count (AADT)
Idaho Ave (31m)	Unavailable
Pacific Ave (103m)	Unavailable
Freeport Road (326 m)	8018 (PennDot 2008)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential
West	Industrial

Direction	Obstructions	Height (m)	Distance (m)
North	Wall	3	20
East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North		Flat
East		Rough
South	Valley	Rough
West	Valley	Rolling

Figure 10.5 Harrison Location Map



10.6 South Fayette

Address	South Fayette Elementary School 3640 Old Oakdale Road McDonald, PA 15057		
AQS#	42-003-0067	MSA	Pittsburgh
Latitude (N)	40.375644	Longitude (W)	-80.169943
Comments	This suburban site is population-based and is the regional transport site for O ₃ and PM _{2.5} . Located in the western portion of the county, this site monitors pollution levels entering the County on prevailing winds. South Fayette is a core PM _{2.5} site that is used to determine compliance with national standards.		

Sensor Type	PM_{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Every Three Days	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Regional Transport, Upwind Background
Monitor Start Date	1/1/1995	Appendix E Siting Criteria	Yes

Sensor Type	Ozone	Appendix C Method Code	47
Network Designation	SLAMS	Probe Height Residence Time	8 Meters 5.3 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Regional
Appendix A QA Assessment	Yes	Appendix D Objectives	General/Background, Regional Transport
Monitor Start Date	1/1/1980	Appendix E Siting Criteria	Yes

South Fayette Area Information

Street Name / Distance	Traffic Count (AADT)
Old Oakdale Rd. (142m)	Unavailable
Cannon Gate Dr. (377m)	Unavailable
Battle Ridge Rd. (554m)	5194 (PennDot 2014)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
-----------	---

North	Residential
East	Residential
South	Agriculture
West	Agriculture

Direction	Obstructions	Height (m)	Distance (m)
North			
East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North		Rolling
East		Rolling
South		Rolling
West		Rolling

Figure 10.6 South Fayette Location Map



10.7 Clairton

Address	Clairton Education Center 501 Waddell Avenue Clairton, PA 15025		
AQS#	42-003-3007	MSA	Pittsburgh
Latitude (N)	40.294341	Longitude (W)	-79.885331
Comments	This is a population-oriented, suburban site that is located within an environmental justice area. Site selection was based on this location being within the Monongahela Valley and generally upwind of the USS Clairton Coke Works. During times of temperature inversions and atypical wind direction, the coke works and other sources in the Monongahela River valley impact this site.		

Sensor Type	PM _{2.5} FEM	Appendix C Method Code	636
Network Designation	SLAMS Secondary	Probe Height	8 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Welfare Concerns
Monitor Start Date	4/2/2022 (replaced PM _{2.5} FRM sampler that started 1/1/2001)	Appendix E Siting Criteria	Yes

Clairton Area Information

Street Name / Distance	Traffic Count (AADT)
Large Ave (29m)	Unavailable
Waddell Ave. (64m)	Unavailable
6th St. (144m)	Unavailable
Saint Clair Ave. (158m)	1763 (PennDot 2012)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Commercial
West	Residential

Direction	Obstructions	Height (m)	Distance (m)
North			

East			
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North	valley	rolling
East	valley	rolling
South		flat
West	valley	rolling

Figure 10.7 Clairton Location Map



10.8 Avalon

Address	721 California Avenue Avalon, PA 15202		
AQS#	42-003-0002	MSA	Pittsburgh
Latitude (N)	40.500840	Longitude (W)	-80.066488
Comments	This is a population-oriented, suburban site previously impacted by the PM and SO ₂ coke battery emissions. Many odor and air pollution complaints were from communities near this monitoring site. However, the coke work battery permanently ceased operations in 2016. As a result, the 2016 1-hour SO ₂ DV is half the 2010 DV and SO ₂ monitoring was removed. Avalon is a core PM _{2.5} site that is used to determine compliance with national standards.		

Sensor Type	PM _{2.5} FEM	Appendix C Method Code	636
Network Designation	SLAMS (Primary)	Probe Height	10 Meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Neighborhood
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure
Monitor Start Date	7/12/2023 (replaced a site with an FEM that began 1/1/2017)	Appendix E Siting Criteria	Yes

Avalon Area Information

Street Name / Distance	Traffic Count (AADT)
California Ave (25m)	Unavailable
N School St (56m)	Unavailable
Center Ave (157m)	Unavailable
N Chestnut St (107m)	Unavailable


Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential
West	Residential

Direction	Obstructions	Height (m)	Distance (m)
North	Trees	15	75
East	Building	15	64
South			

West			
------	--	--	--

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North	Hill	Rolling
East		Flat
South	River	Flat
West		Flat

Figure 10.8 Avalon Location Map

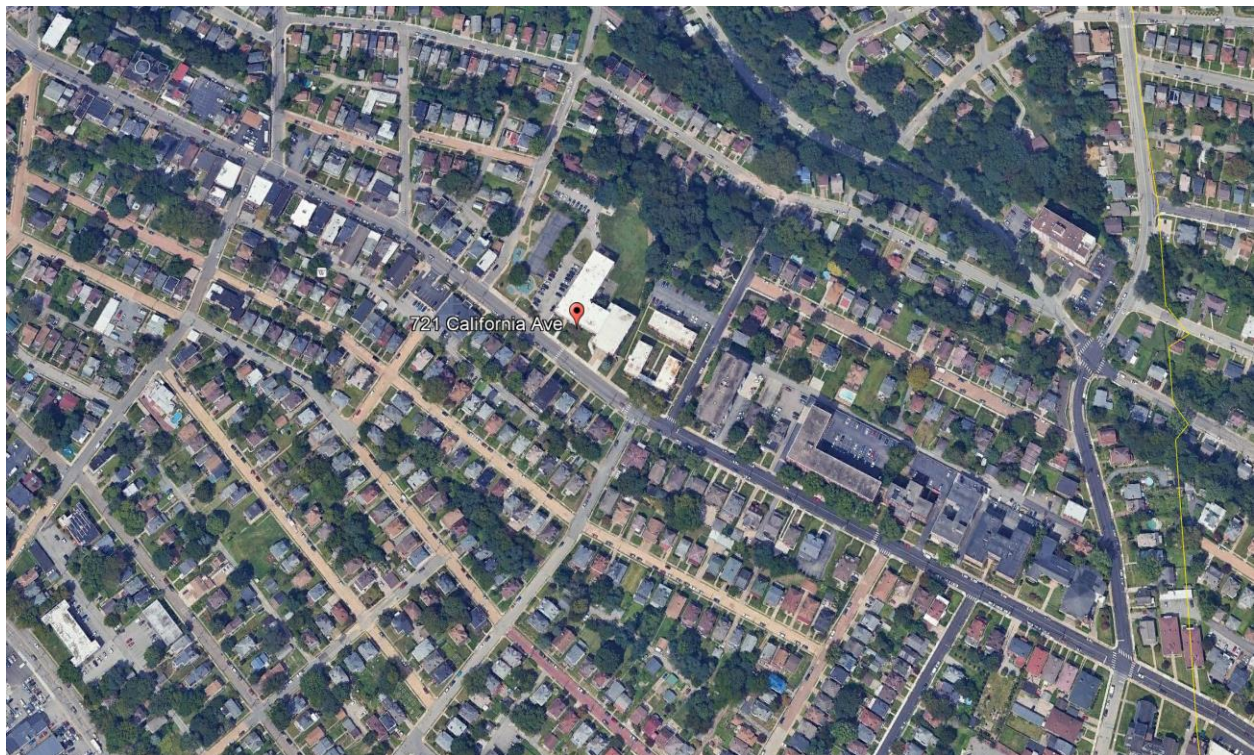

10.9 Parkway East

Address	Hosanna House Event Center 400 Sherwood Road Pittsburgh, PA 15221		
AQS#	42-003-1376	MSA	Pittsburgh
Latitude (N)	40.437430	Longitude (W)	-79.863572
Comments	This site was installed to comply with NO ₂ design criteria. Monitor inlets sample air at 18 meters from the nearest traffic lane of Route 376 (Parkway East). This location was approved by EPA as a near road monitoring site that measures population exposure to roadway emissions. Concentration data for CO and NO ₂ are near network maximums.		

Sensor Type	PM_{2.5} FEM	Appendix C Method Code	636
Network Designation	SLAMS	Probe Height	4 meters
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Microscale
Appendix A QA Assessment	Yes	Appendix D Objectives	Population Exposure, Source Oriented
Monitor Start Date	1/1/2016	Appendix E Siting Criteria	Yes

Sensor Type	PM_{2.5} FRM	Appendix C Method Code	145
Network Designation	SLAMS Secondary	Probe Height	4 Meters
Purpose	QA/Co-located Monitor	Appendix D Design Criteria	Yes
Sample Frequency	Every Twelve Days	Appendix D Scale	Neighborhood, Highest Concentration
Appendix A QA Assessment	Yes	Appendix D Objectives	Quality Assurance
Monitor Start Date	1/10/2021	Appendix E Siting Criteria	Yes

Sensor Type	Oxides of Nitrogen + True NO₂	Appendix C Method Code	256
Network Designation	SLAMS	Probe Height Residence Time	3 Meters 5.3 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Microscale
Appendix A QA Assessment	Yes	Appendix D Objectives	Highest Concentration
Monitor Start Date	12/9/2022 (replaces NO _x monitor that began 9/1/2014)	Appendix E Siting Criteria	Yes

Sensor Type	Carbon Monoxide (CO)	Appendix C	593
-------------	-----------------------------	------------	-----

	Trace Level	Method Code	
Network Designation	SLAMS	Probe Height Residence Time	3 Meters 3.4 Seconds
Purpose	Regulatory Compliance	Appendix D Design Criteria	Yes
Sample Frequency	Hourly	Appendix D Scale	Microscale
Appendix A QA Assessment	Yes	Appendix D Objectives	Highest Concentration
Monitor Start Date	9/1/2014	Appendix E Siting Criteria	Yes

Parkway East Meteorological Sensors

- Wind Speed / Wind Direction
- Relative Humidity
- Ambient Temperature

Parkway East Area Information

Street Name / Distance	Traffic Count (AADT)
Penn Lincoln Parkway, Rt. I-376 (18 m)	75,971 (PennDot 2014)

Direction	Predominant Land Use (Industry, Residential, Commercial or Agriculture)
North	Residential
East	Residential
South	Residential
West	Residential


Direction	Obstructions	Height (m)	Distance (m)
North			
East	Trees	15	33
South			
West			

Direction	Topographic Features (hills, valleys, rivers, etc.)	General Terrain (flat, rolling, rough)
North		Rolling

East	Hill	Rough
South		Rolling
West		Rolling

Figure 10.9.1 Parkway East Location Map

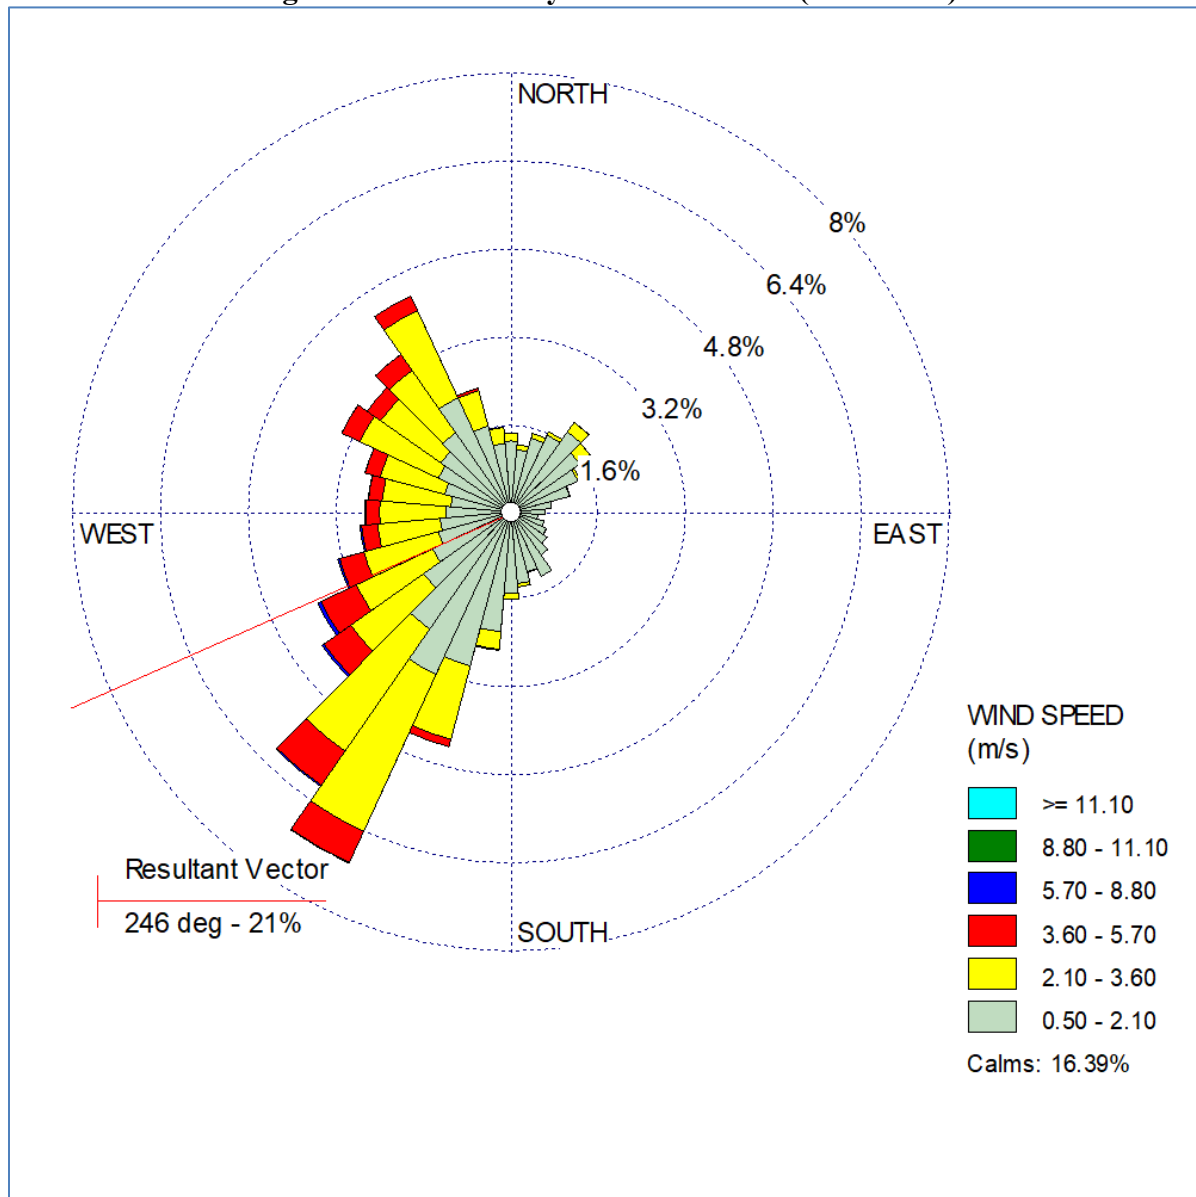

Figure 10.9.2 Parkway East Wind Rose (2020-2024)

11.0 GLOSSARY OF TERMS AND ABBREVIATIONS

AADT	Annual Average Daily Traffic count. This is the unit of measure used in this report to indicate vehicular traffic density as received from Penn Dot (Pennsylvania Department of Transportation) and represents the daily two-way traffic count averaged over a calendar year for the indicated roadway segment. The year that the data was collected is included.
Aethalometer	A continuous monitor designed to measure diesel mobile emissions by quantifying black carbon particles. This is a research instrument and does not determine compliance with NAAQS.
Benzene	C ₆ H ₆ . A six-carbon aromatic ring known to be a carcinogen. Emitted by mobile and industrial sources in Allegheny County.
CO	Carbon Monoxide. Measured using a continuous automated analyzer.
Criteria Pollutants	Air pollutants considered harmful to public health and the environment (carbon monoxide, nitrogen dioxide, sulfur dioxide, ozone, lead, particulate matter: PM ₁₀ , PM _{2.5})
FEM	Federal Equivalent Method. Secondary methods approved by the USEPA for measurement of criteria pollutants and determination of compliance with NAAQS.
FRM	Federal Reference Method. Primary measurement methods designated by the USEPA for measurement of criteria pollutants and determination of compliance with NAAQS.
Lead (Pb)	Lead Monitoring. Laboratory analysis of Total Suspended Particle filters. This analysis is performed according to the federal reference method for lead monitoring.
NAAQS	National Ambient Air Quality Standards. These standards apply only to the six criteria pollutants
NATTS	National Air Toxics Trends Station. Air monitoring program to assess nationwide air toxics trends. The ACHD Lawrenceville station became a NATTS site in 2020.
NCore	National Core Monitoring Network, consisting of multi-pollutant ambient air monitoring sites, and specializing in PM _{2.5} and associated precursor gases.
Near Road	Monitoring site designed to measure peak exposure to roadway emissions. Required monitoring parameters are NO ₂ , CO, and PM _{2.5} . Installation of near road monitoring sites were required by revisions to the NO ₂ NAAQS during 2010.
NO_x	Oxides of nitrogen, including nitric oxide and nitrogen dioxide. Measured using a continuous automated analyzer.
NO_y	Total reactive nitrogen. A collective name for oxidized forms of nitrogen in the atmosphere such as nitric oxide (NO), nitrogen dioxide (NO ₂), nitric acid (HNO ₃), and numerous short lived and reactive organic nitrates (but not NH ₃). These compounds play important roles in atmospheric ozone and ultra-fine particle formation.
O₃	Ozone. Measured using a continuous automated analyzer.
PAMS	Photochemical Assessment Monitoring Stations

PM₁₀	All suspended particles equal to or smaller than 10 microns.
PM_{2.5}	All suspended particles equal to or smaller than 2.5 microns. Frequently referred to as fine particulates.
PM_(coarse)	All suspended particulates smaller than 10 microns but larger than 2.5 microns, also often referred to as PM _{10-2.5} . EPA has not assigned a NAAQS to this parameter as of the date of this document.
SLAMS	State or Local Air Monitoring Stations Network. The SLAMS make up the ambient air quality monitoring sites that are operated by State or local agencies for the primary purpose of comparison to the National Ambient Air Quality Standards (NAAQS), but may serve other purposes. The SLAMS network includes stations classified as NCore, PAMS, and Speciation, and formerly categorized as NAMS, and does not include Special Purpose Monitors (SPM) and other monitors used for non-regulatory or industrial monitoring purposes.
SO₂	Sulfur Dioxide. Measured using a continuous automated analyzer.
Sonic Anemometer	A method to measure wind speed and wind direction that uses ultrasonic sound waves to precisely measure wind speed and wind direction. This method features much better accuracy, sensitivity and longevity as compared to the traditional “cup and vane” wind sensing method. The sonic anemometers utilized by the department are heated to avoid ice accumulation on the sensors.
Speciation	PM _{2.5} speciation monitor. Multiple filter-based samples which yield a breakdown of PM _{2.5} composition. Analytes include heavy metals, sulfates, nitrates and various species of carbon. Analysis is conducted by the US EPA national contract lab.
SPM	Special Purpose Monitor. An SPM is defined as any network monitor that the agency has designated as a special purpose monitor in its annual monitoring network plan and in AQS. SPMs do not count when showing compliance with the minimum requirements for the number and siting of monitors of various types.
TEOM	(Tapered Element Oscillating Microbalance) this technology is used by the Thermo-Scientific model 1400ab continuous particulate monitor, which has FEM designation for PM ₁₀ measurement.
TO11	An EPA compendium method for air toxics sampling. Operated every 6 days for 24 hours, the sample is collected into a 2,4-DNPH (dinitrophenylhydrazine) cartridge and is analyzed by Eastern Research Group Laboratory. This procedure has been written specifically for the sampling and analysis of formaldehyde, the most important carbonyl that participates in ozone formation. However, the analysis also yields acetone, propionaldehyde, acetaldehyde, benzaldehyde, methyl ethyl ketone and methyl isobutyl ketone results
TO15	An EPA compendium method for air toxics sampling. Operated every 6 days for 24 hours, the sample is collected into a special prepared stainless-steel canister and is then sent to the laboratory for analysis. The analysis tests for 62 volatile organic compounds.
VSCC	Very Sharp Cut Cyclone. A particulate sizing device for use with PM _{2.5} FRM and FEM monitors. The VSCC is commonly used to accomplish the final PM _{2.5} size cut in low flow (16.7 lpm), continuous particulate monitors.

12.0 Public Comment Period

This network review is available for public comment beginning on August 27, 2025. Comments can be made by e-mail and conventional mail until the close of business on September 25, 2025. All comments received as well as ACHD responses were included in the final version submitted to EPA Region III.

Submit comments by e-mail → David.Good@AlleghenyCounty.US

Submit comments by conventional mail → **David D. Good
836 Fulton Street
Pittsburgh, PA 15233**

Appendix A: Special Study Projects

A1: Introduction

ACHD frequently conducts investigations and studies using techniques that produce quantifiable results by methods that may not be classified by the USEPA as approved reference or equivalent methods. Often these investigations originate as responses to citizen concerns or complaints. This section briefly describes special studies that are currently ongoing or have been discontinued within the past year. Data from these studies is not submitted to the AQS database, however much of it is available for review on the ACHD webpage or through a right to know request ([Open Records page](#)).

A2: Air Toxics Sampling

A2.1 Lawrenceville National Air Toxics Trends Station (NATTS)

The National Air Toxics Trends Station (NATTS) program was developed by the EPA to fulfill the need for long-term hazardous air pollutants (HAP) monitoring data of consistent quality. The Lawrenceville NCORE site was selected by the EPA for inclusion into the NATTS program and began operations in August of 2020. The NATTS monitoring is year-round on a 1 in 6-day sampling frequency. NATTS sampling includes:

- **Volatile Organic Compounds** using SUMMA canister sampling via EPA Compendium Method TO-15.
- **Carbonyls** using DNPH cartridge sampling via EPA Compendium Method TO-11A.
- **Polycyclic Aromatic Hydrocarbons** using glass cartridge PUF sampling via EPA Compendium Method TO-13A.
- **PM₁₀ Metals** using a HI-VOL PM₁₀ sampler and quartz fiber filters via EPA Compendium Method IO-3.5.

A2.2 Charcoal Tube Sampling

Charcoal tube sampling is used by ACHD to measure ambient concentrations of targeted VOCs. 24-hour average samples are collected at Liberty every three days. Sampling is performed using sampling pumps calibrated to 1 liter per minute. Each tube is exposed for 24 hours, from midnight to midnight. The exposed sorbent tubes are sent to the Allegheny County Medical Examiner's Laboratory for analysis by a GC/FID method for benzene, ethyl benzene, toluene, and xylenes (BTEX). Data is available upon request.

A2.3 Hydrogen Sulfide

Hydrogen Sulfide is an odorous compound that has a very low odor detection threshold concentration. Expectedly, numerous ongoing community odor complaints are common near industries that release hydrogen sulfide. Traditionally, ACHD has measured H₂S at monitoring

sites impacted by the metallurgical coking industry. Hydrogen sulfide is routinely and continuously measured at the Liberty and North Braddock air monitoring sites. Recent hourly hydrogen sulfide data is available on the Air Quality Program's portion of the ACHD website and historic data is available to the public upon request. The Department references ambient H₂S standards as listed in the Pennsylvania Code, Title 25, Chapter 131.3 (24-hour average not to exceed 0.005 ppm, 1-hour average not to exceed 0.1 ppm).

In a May 2025 letter from the PA DEP to Allegheny County, the DEP determined that the methodology by ACHD (Ecotech H₂S converter used in tandem with a Teledyne API T100) produces and quantifies data of acceptable quality for the purpose of comparison to the PA Ambient Air Quality Standard for H₂S set forth in 25 Pa. Code 131.3. The PA DEP uses a similar technology via the Teledyne T101 sensor, and ACHD is considering employing that instrument into the network in the future.

A3: Settled Particulate

Total settled particulate, also commonly referred to as dust fall, was collected and quantified in various locations in Allegheny County using ASTM method D 1793, which yields monthly average concentrations. This simple method is employed in response to complaints of heavy dust deposits in communities. There are no current active deployments of this monitoring.